DC-600 VRD MACHINE SCHEMATIC G3575-3 REV: A

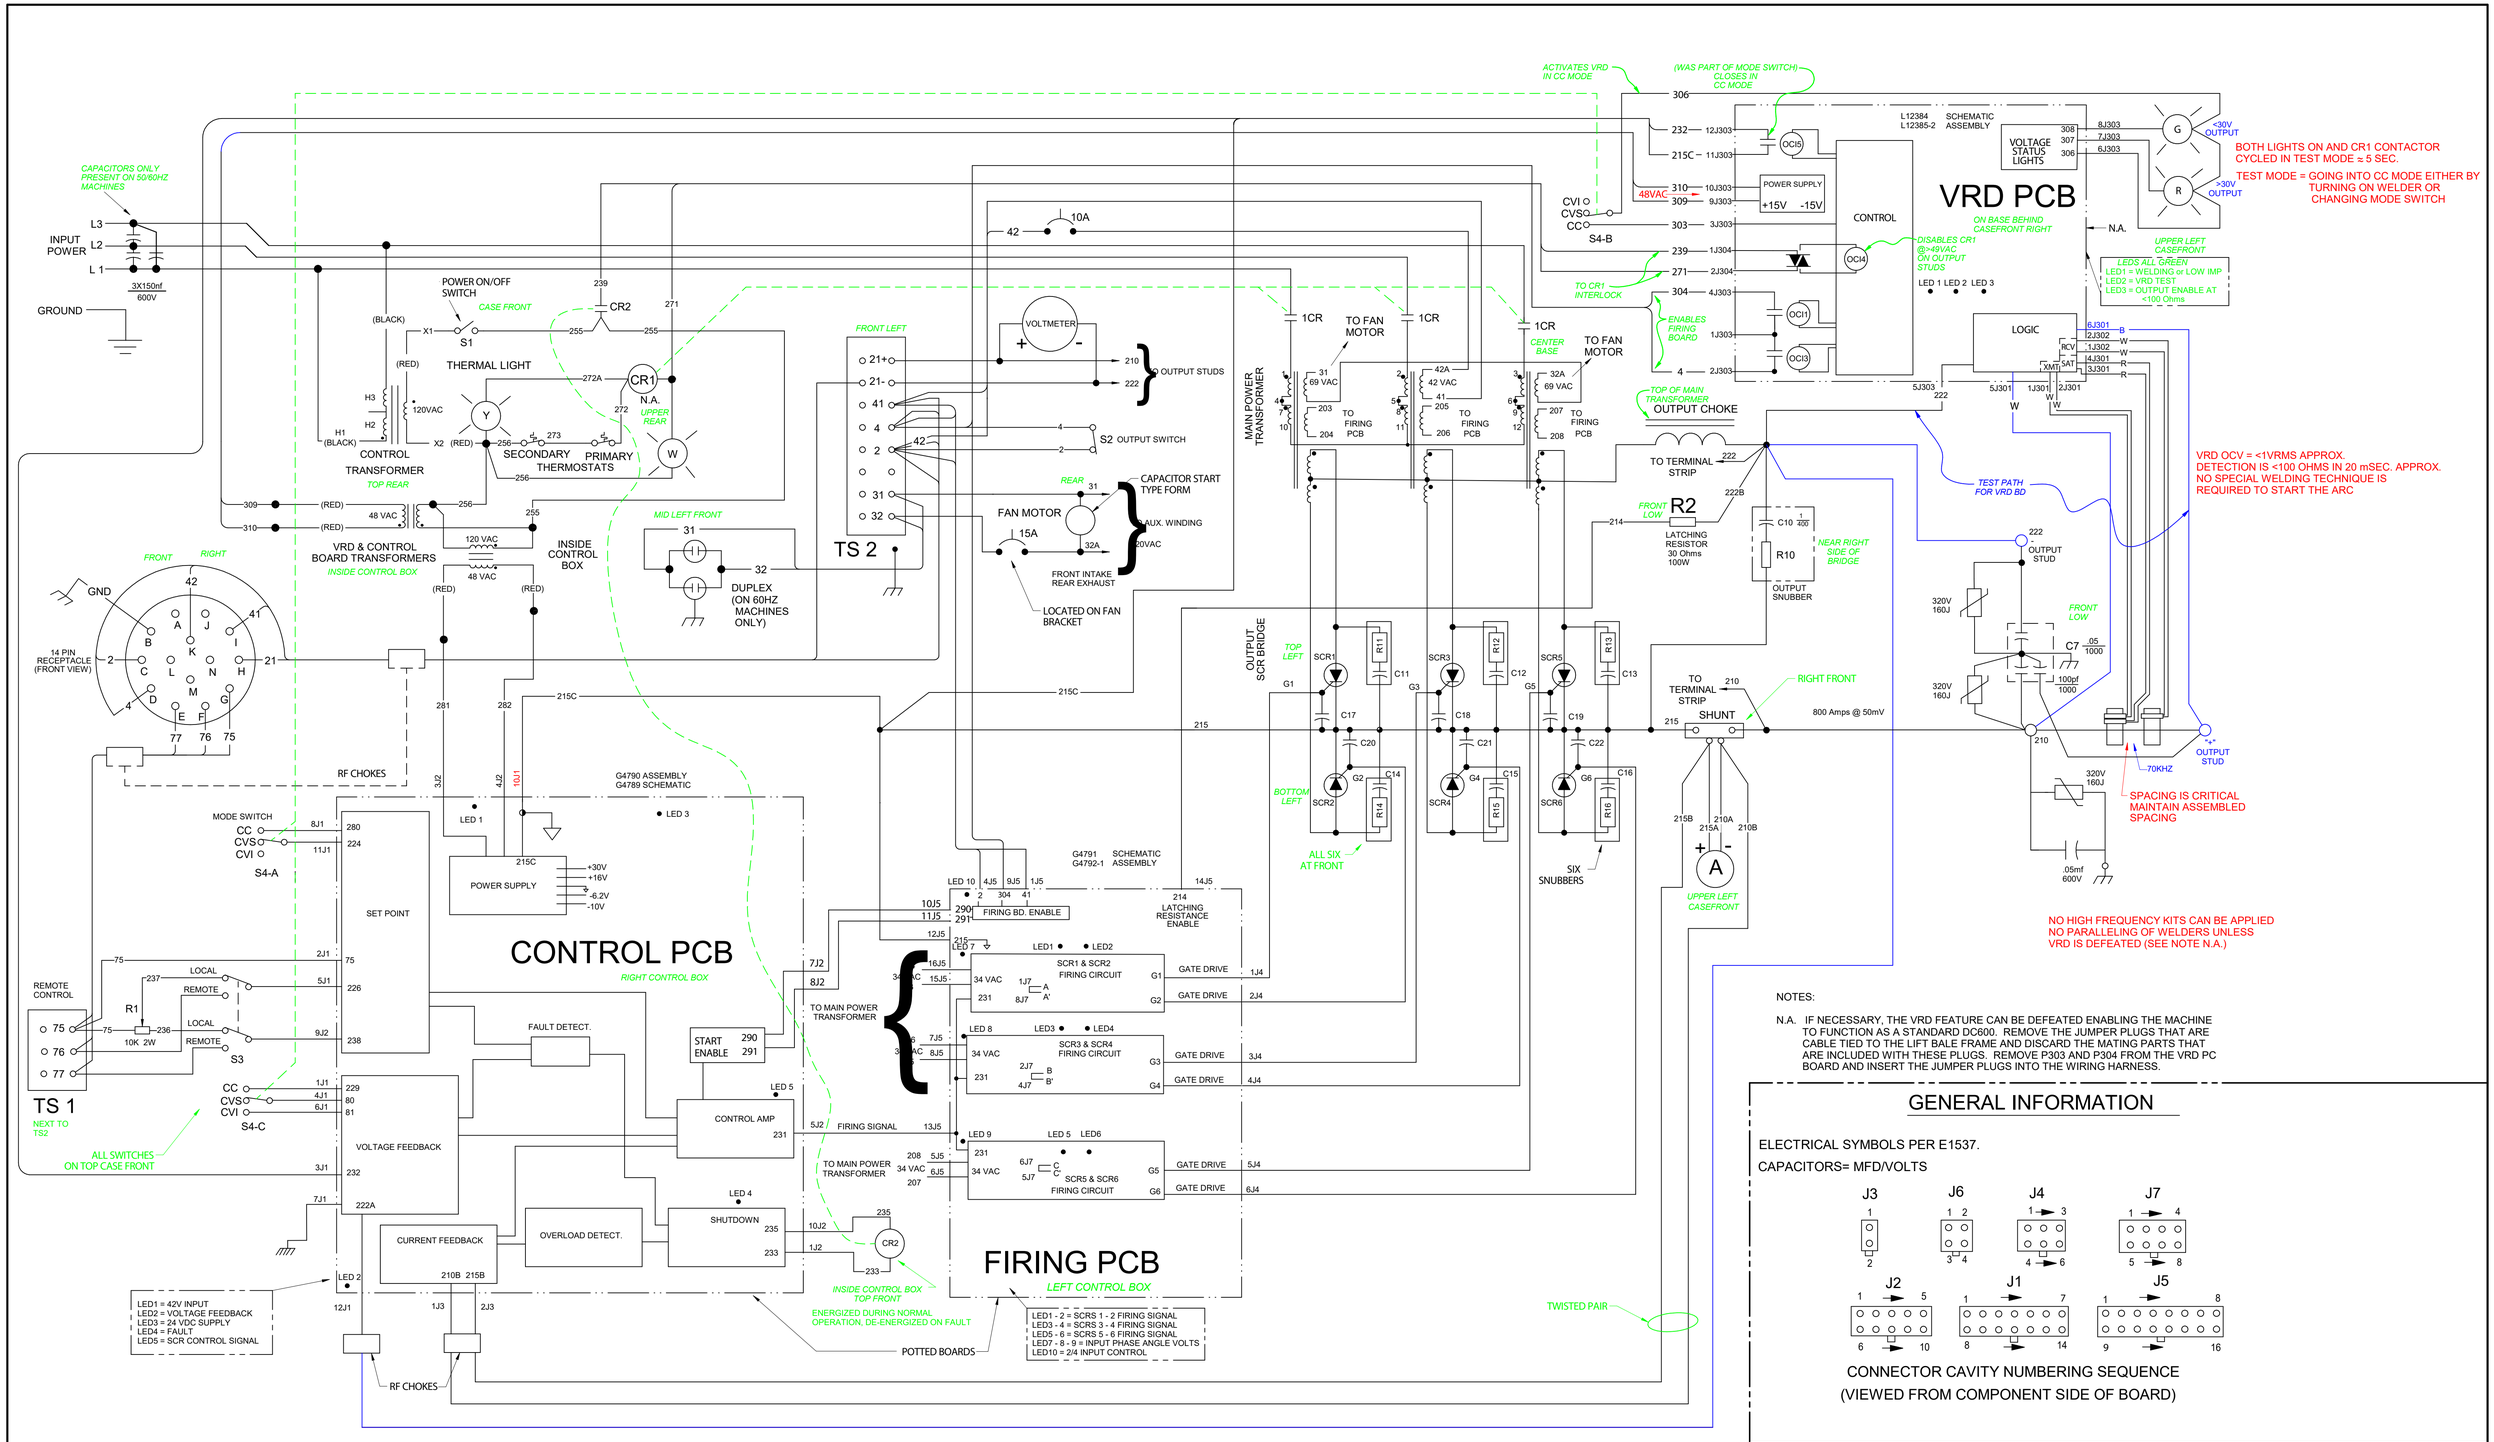

NOTES:

N.A. IF NECESSARY, THE VRD FEATURE CAN BE DEFEATED ENABLING THE MACHINE TO FUNCTION AS A STANDARD DC600. REMOVE THE JUMPER PLUGS THAT ARE CABLE TIED TO THE LIFT BALE FRAME AND DISCARD THE MATING PARTS THAT ARE INCLUDED WITH THESE PLUGS. REMOVE P303 AND P304 FROM THE VRD PC BOARD AND INSERT THE JUMPER PLUGS INTO THE WIRING HARNESS.

GENERAL INFORMATION

ELECTRICAL SYMBOLS PER E1537.

CAPACITORS= MFD/VOLTS

CONNECTOR CAVITY NUMBERING SEQUENCE
(VIEWED FROM COMPONENT SIDE OF BOARD)