

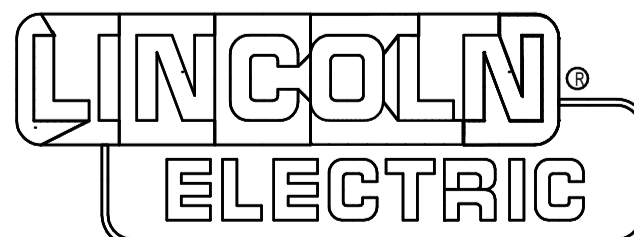
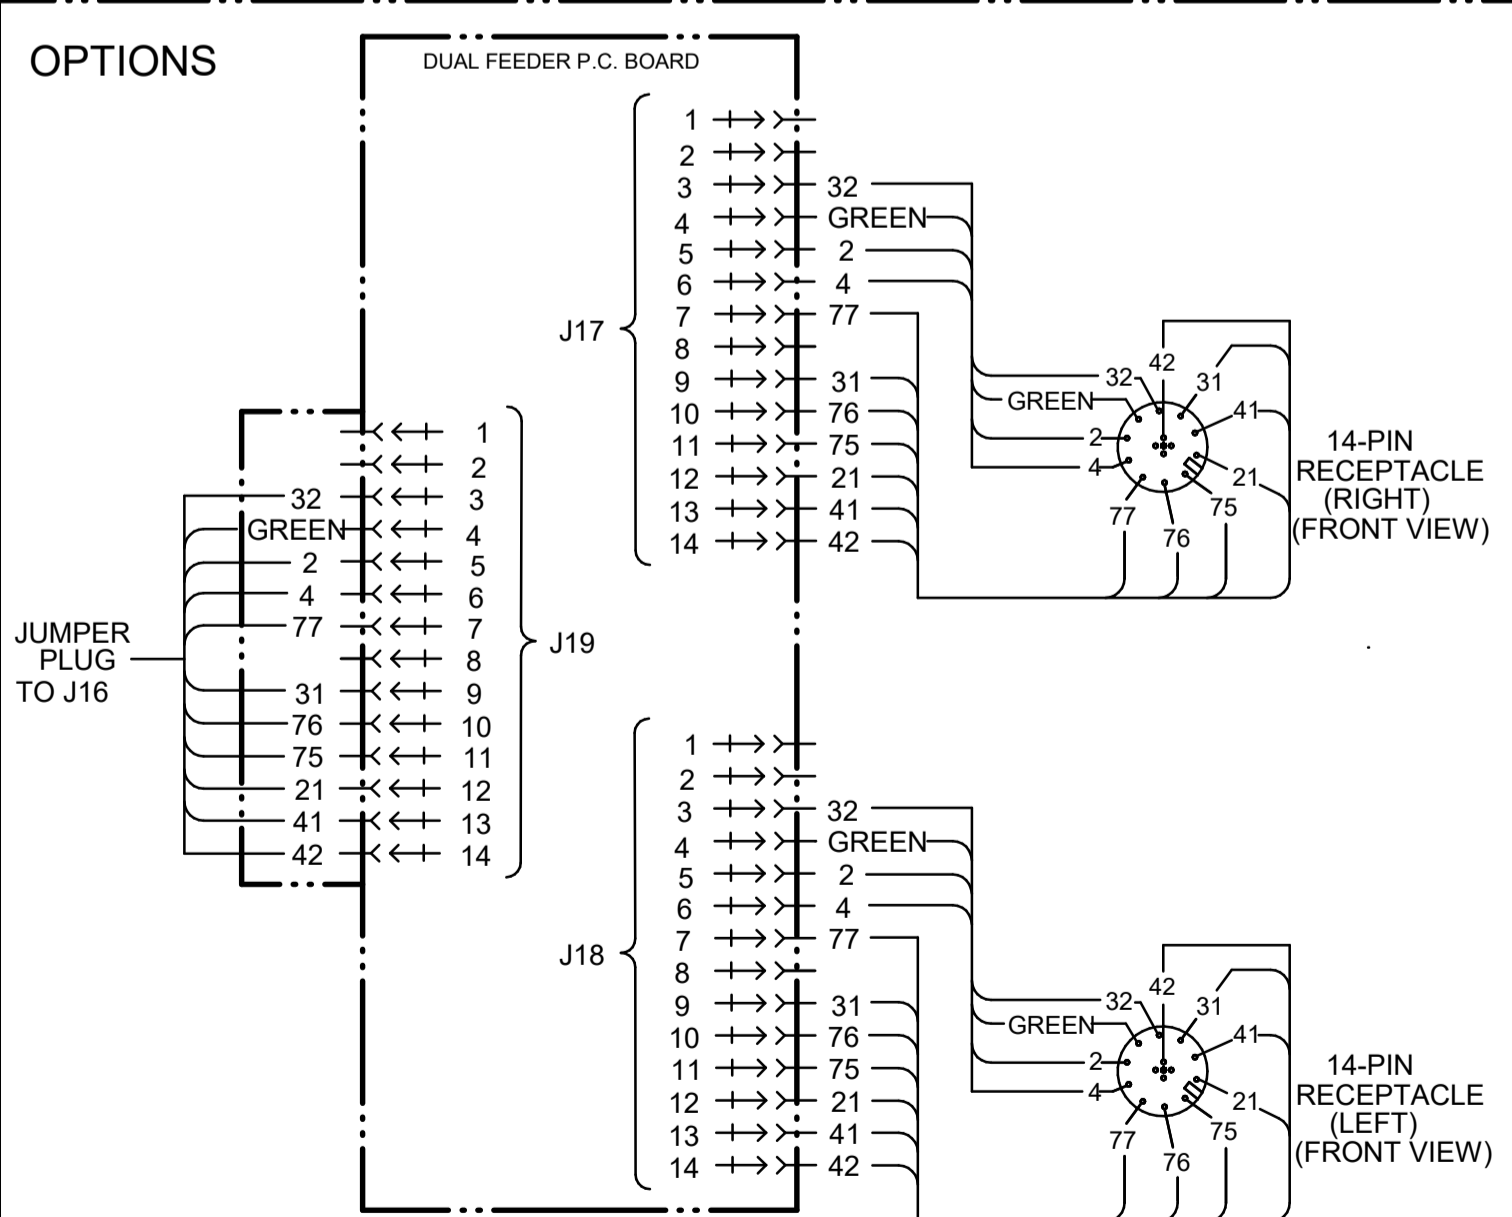
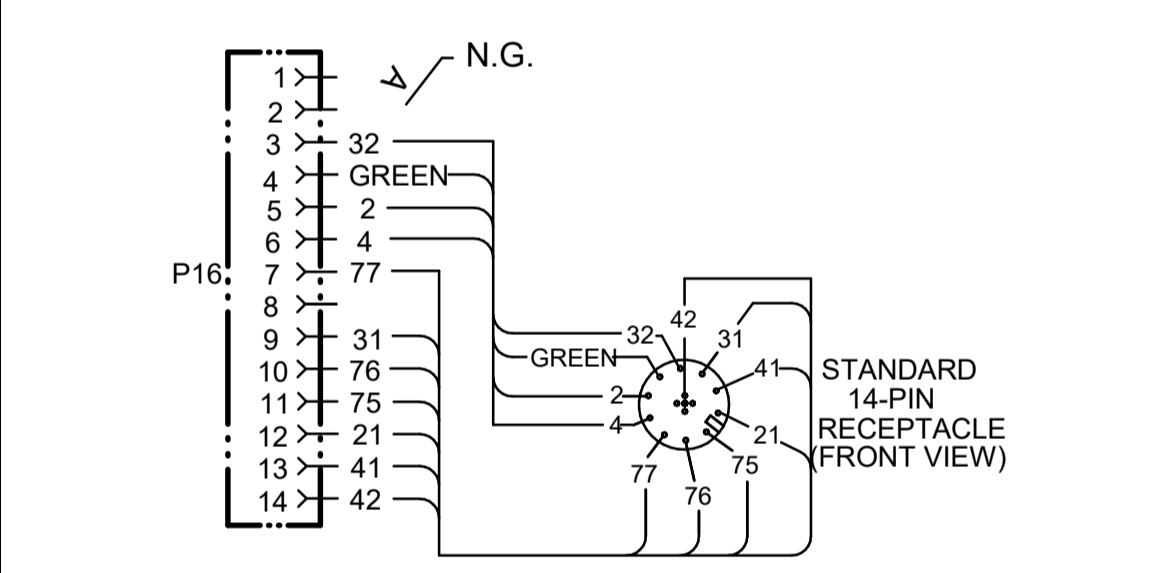


DC655 (DOMESTIC 60 HZ) WIRING DIAGRAM G3348-1 REV: C

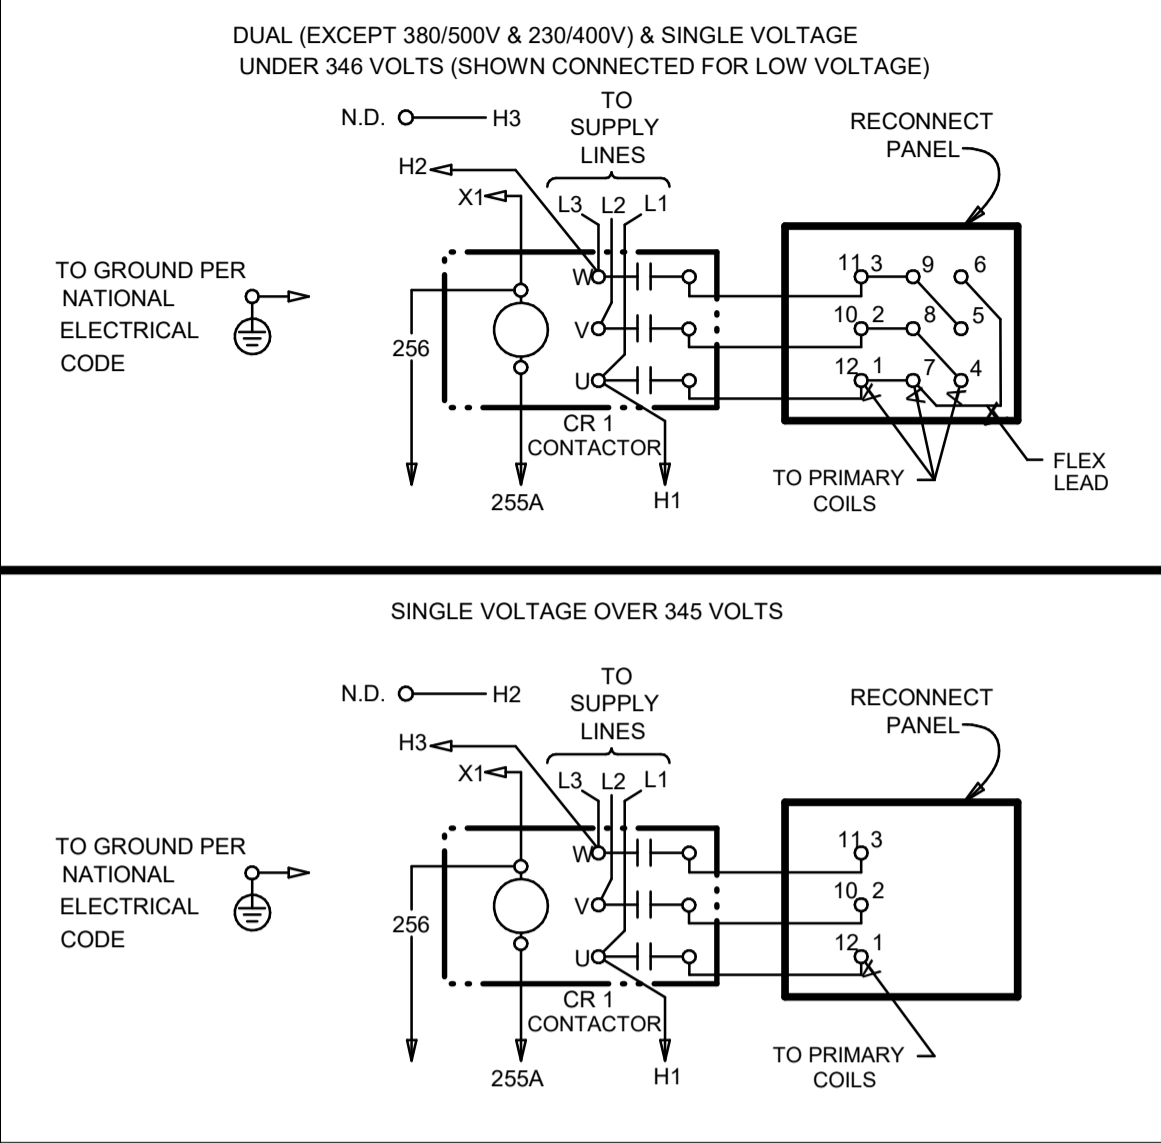

CLEVELAND, OHIO, U.S.A.

- NOTES:
- N.A. LEADS 4 THRU 9 ARE NOT PRESENT ON 380/500V, AND SINGLE VOLTAGES OVER 345V MACHINES.
 - N.D. TAPE UP SEPARATELY TO PROVIDE AT LEAST 600V INSULATION.
 - N.E. PLUG & LEAD ASSEMBLY GOES TO EITHER J12 (OPTIONAL DIGITAL METERS PC BD.) OR J14 (IN LINE CONNECTOR FOR ANALOG METERS).
 - N.F. LOCATED IN SECONDARY COIL WINDING.
 - N.G. STANDARD 14-PIN RECEPTACLE PLUGS INTO J16 ON STANDARD MACHINES AND IS REPLACED BY DUAL FEEDER OPTION IF USED.
 - N.H. LOCATED ON OUTPUT RECTIFIER FLAT HEAT SINK.
 - N.J. AS SHIPPED ONLY SWITCH #4 IS ON (UP). SEE INSTRUCTION MANUAL.

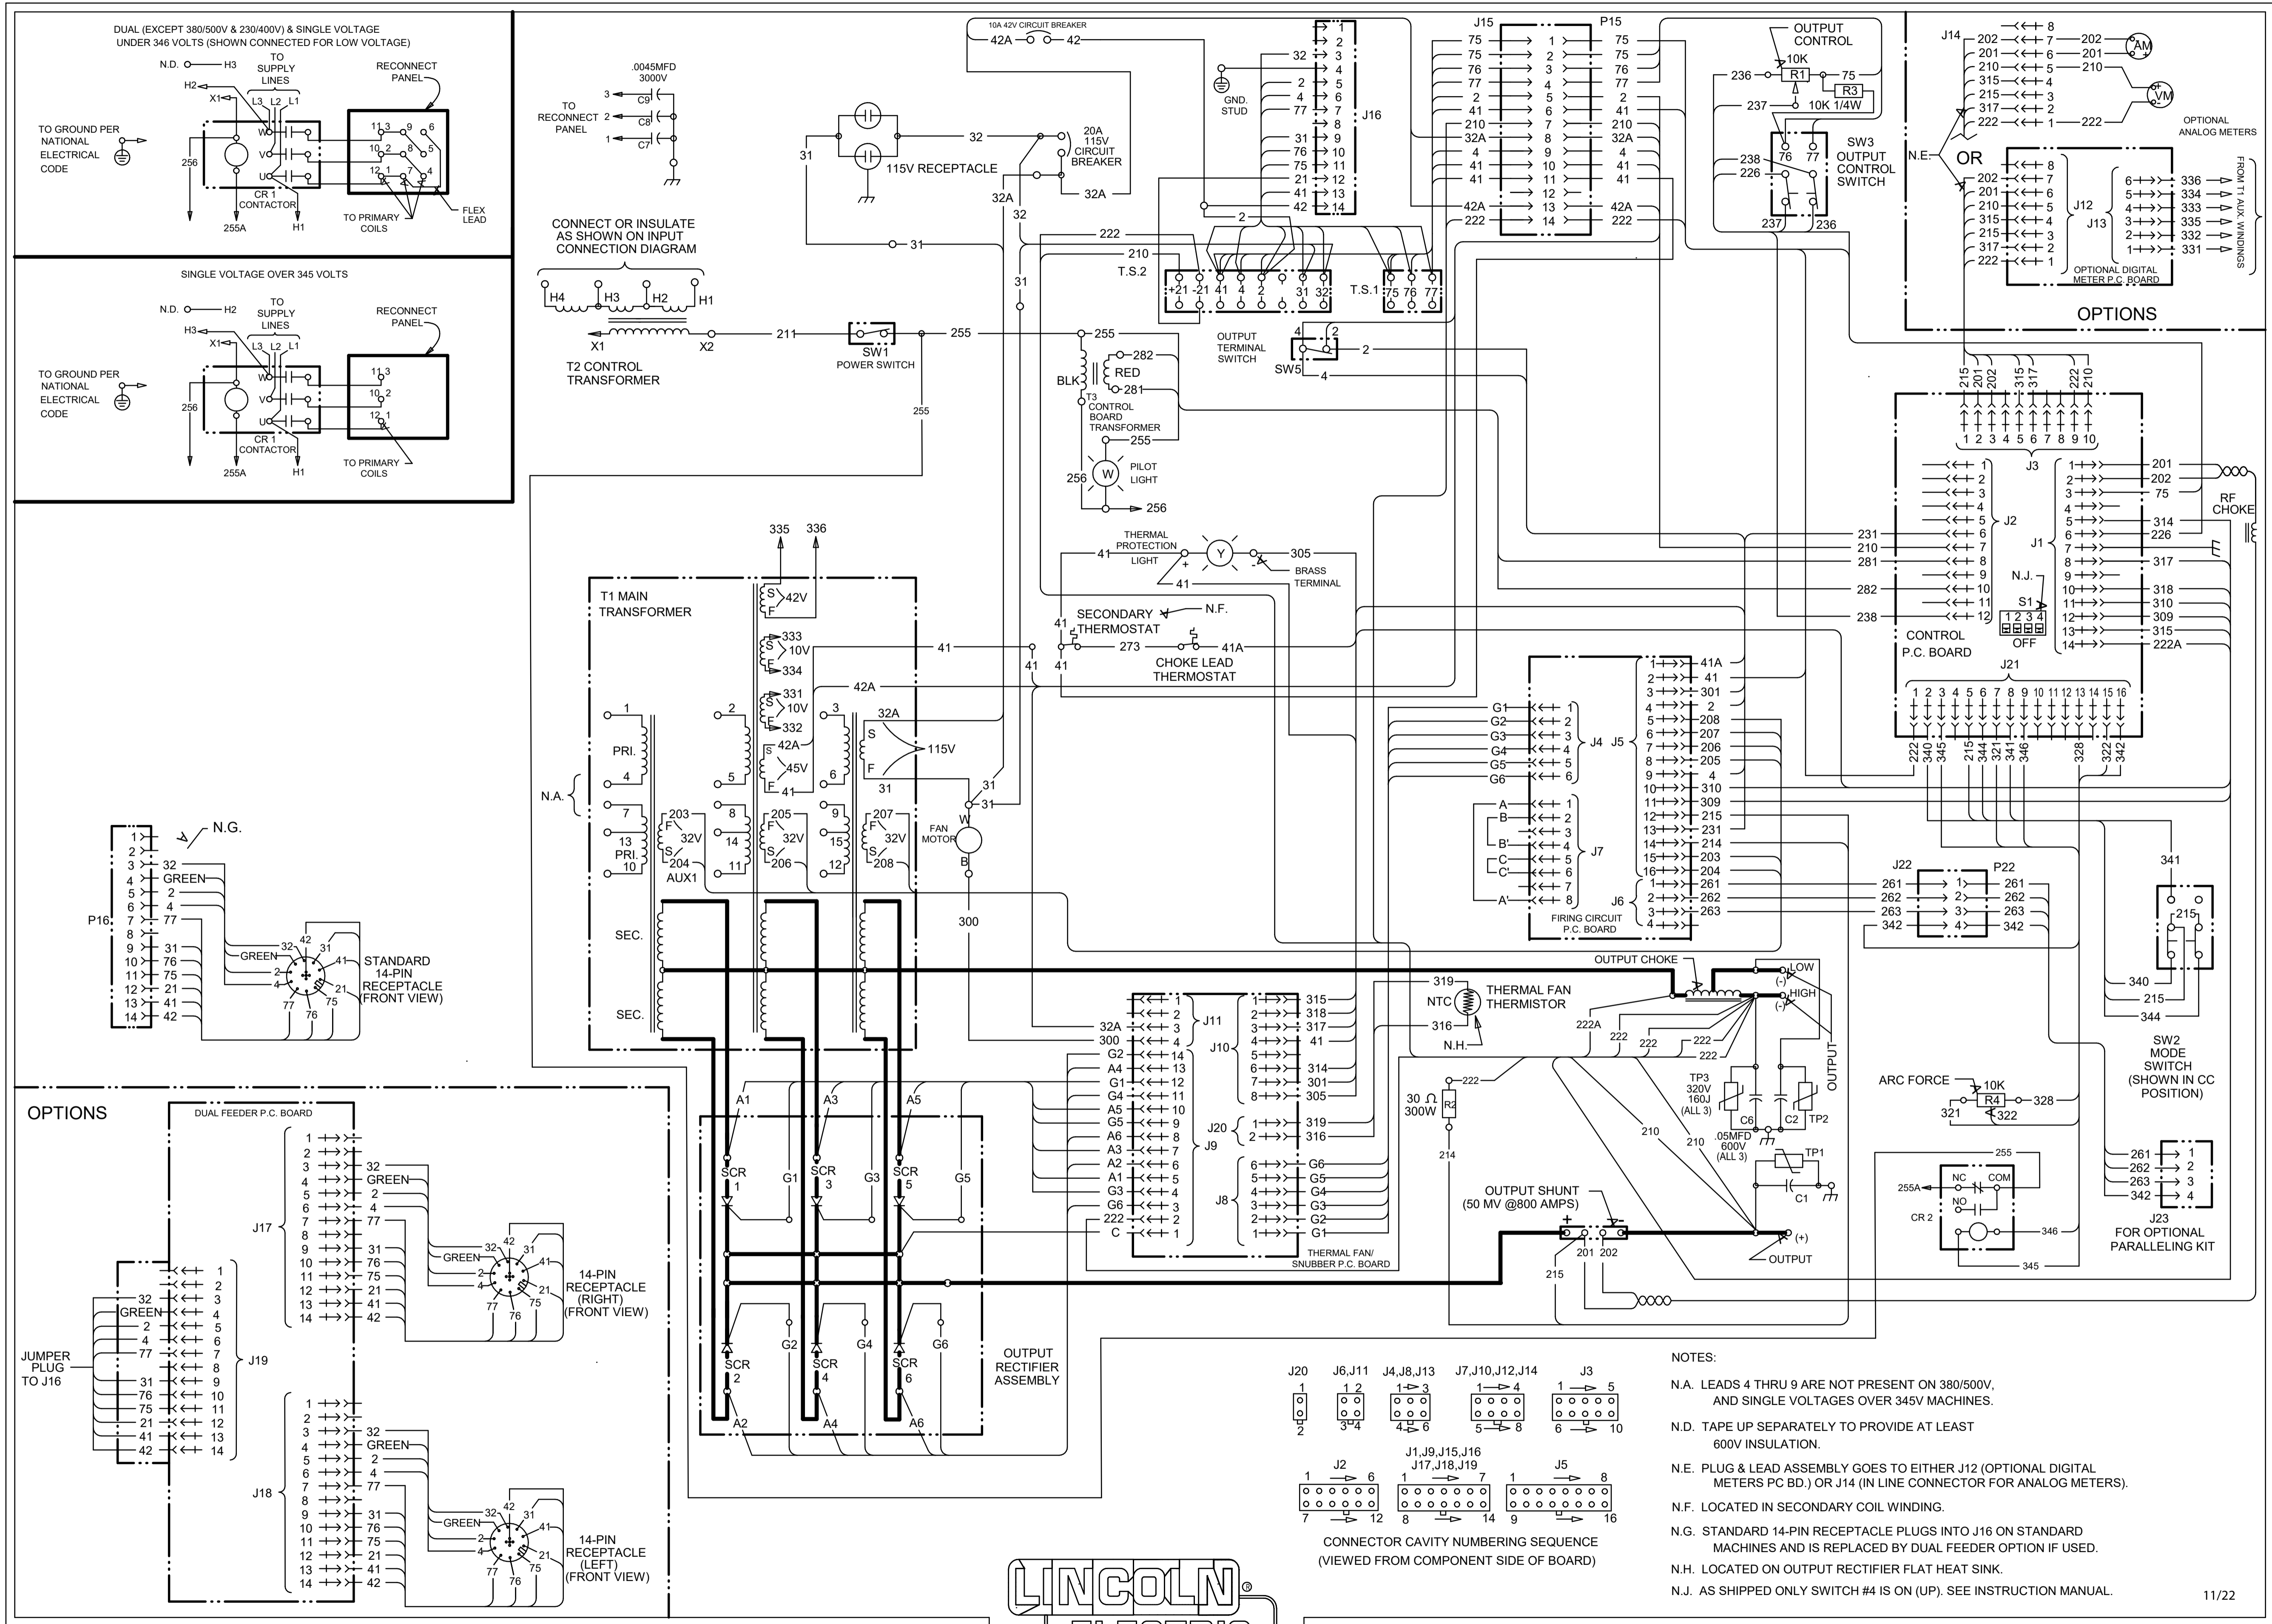