SINGLE AND DOUBLE OUTLET DROPS

DESCRIPTION

The Harris Products Group offers OSHA compliant single and dual station drops to safely deliver gas from central piping systems to welding and oxy-fuel work stations. Single station drops are plumbed for a second outlet if expansion is ever needed. Oxy-fuel drops have internal check valves to meet OSHA and NFPA requirements. All models come with gas specific CGA connections as well as hard cap and chain to keep passages free of dust and contamination. Remove the plug on the bottom drip leg to remove moisture from the gas line.

DETAILS


• Inlet - 1/2" FNPT. 1/4 Turn Quick Opening Valve

• Mount - Rear mount and side mount models

- Max Inlet Pressure 200 psi
- Gas Specific Labels Shipped with all Models Drip Leg removes pipeline moisture

 - Length 20" (Ref.) for both single and dual drops



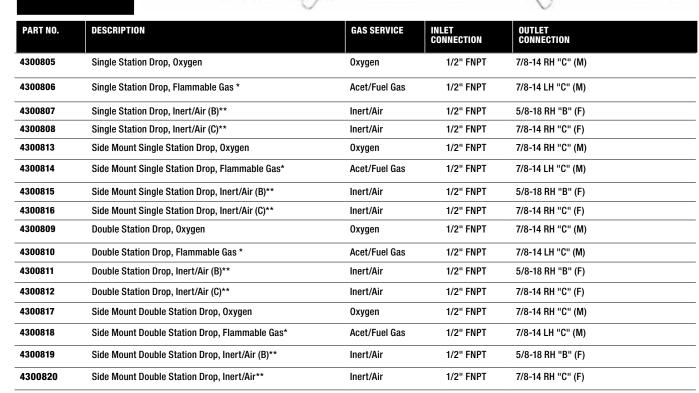

* Flammable Gas Models include labels for Acetylene, LPG and Hydrogen

**Inert/Air Models include labels for Argon, CO2, Helium, Nitrogen, Ar/CO2, Air

The Harris Products Group A Lincoln Electric Company 4501 Quality Place - Mason, OH 45040 Customer Service: 1.800.733.4043 Fax: 513.754.8778 www.harrisproductsgroup.com



062018 9700276