


# 17-4 PH STAINLESS STEEL

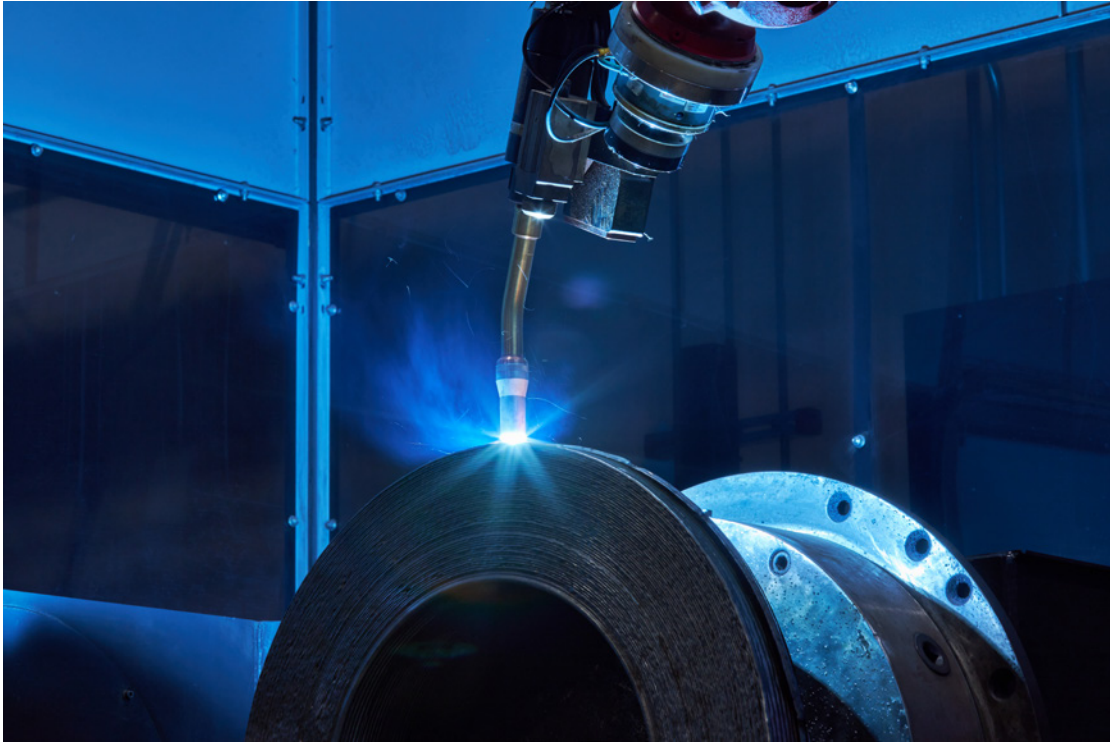

## KEY FEATURES

17-4 PH stainless steel offers a combination of high strength, good corrosion resistance, and toughness. It withstands corrosive attacks better than most hardenable stainless steels. Its high strength is maintained to approximately 600° F and it is resistant to crack propagation. This makes 17-4 PH stainless steel ideal for applications such as: aerospace structures, nuclear waste processing and storage, petroleum refining, pulp and paper processing, chemical processing and more.

17-4 PH stainless steel mechanical properties compare favorably to the following stainless steel grades:

ASTM A564, Type 630

ASTM A693, Type 630

ASTM A705, Type 630

ASTM A747, Grade CB7Cu-1

### Typical Applications »

- Aerospace structures
- Nuclear waste processing and storage
- Petroleum refining
- Pulp and paper processing
- Chemical processing

## NOMINAL MECHANICAL PROPERTIES

GMAAM <sup>(1)</sup>	Heat Treatment	Room Temperature Strength			Toughness	
		YS @ 0.2% Off (ksi)	UTS (ksi)	Elong (%)	ft-lbs @ 70 °F	ft-lbs @ -20 °F
17-4 PH	None	50	160	10	20	-
	H900 <sup>(2)</sup>	165	185	15	20	-
	H1025 <sup>(3)</sup>	140	160	18	30	20
	H1150 <sup>(4)</sup>	100	140	21	45	35

(1) Gas Metal Arc Additive Manufacturing (As-Printed)

(2) Two-step heat treat: 1900° F with air cool; 900° F with air cool

(3) Two-step heat treat: 1900° F with air cool; 1025° F with air cool

(4) Two-step heat treat: 1900° F with air cool; 1150° F with air cool

### Test Results

Test results for mechanical properties were obtained from GMAAM deposits produced and tested according to prescribed standards. Users are cautioned to confirm by qualification testing, or other appropriate means, the suitability of any GMAAM component before use in the intended application. This data is for illustrative purposes only. Actual results may vary.

### CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to [www.lincolnelectric.com](http://www.lincolnelectric.com) for any updated information.