


Rimrock® 090 Spray Wand

Small Air Volume for Minimum Spray

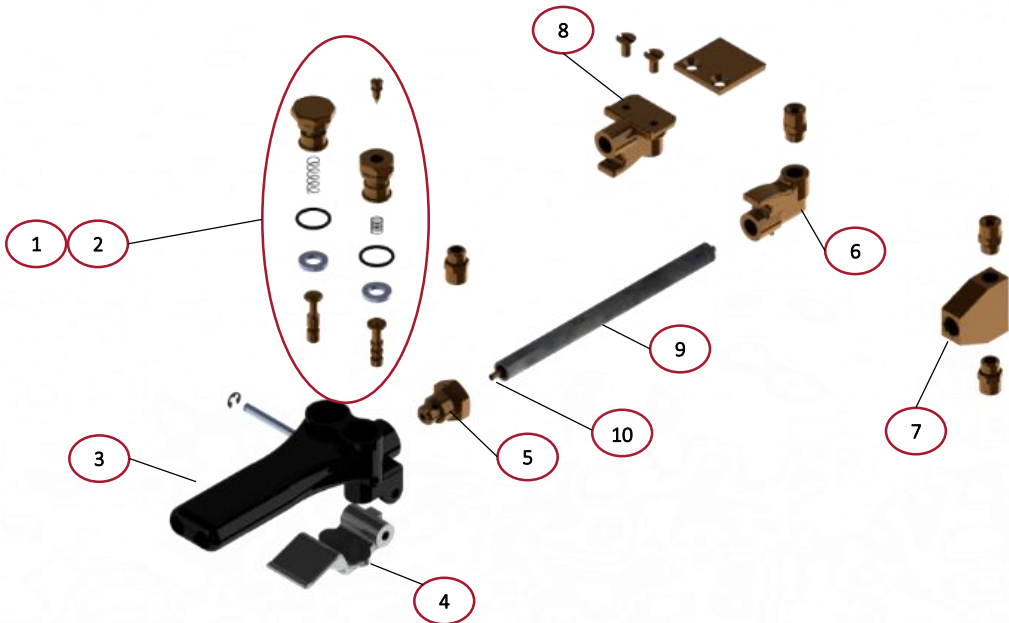

Specifications

Application

- Die Casting
- Stamping
- Rubber Molding
- Forging (*verify cP below*)

Flow Rates (at 30 PSI)

- Air: 3 CFM (max)
- Liquid: 0.30 GPM (max)

Filtration & Viscosity

- Liquid: 80 Mesh (200 Micron)
1000 cP (*call for custom req.*)

Connections

- Air: 1/8 NPT (1/4 Hose)
- Liquid: 1/8 NPT (1/4 Hose)

REF #	DESCRIPTION	LEGACY P/N	A SERIES P/N
1	090 SEALS & SPRINGS REPAIR KIT	05408-1	A4007120
2	090 COMPLETE REBUILD KIT	05408-2	A4008187
3	090 BODY	01209	A4006817
4	TRIGGER LEVER – ALUM	01206-W	A3032140
5	LUBE TUBE ADAPTER	01231-12	A4007049-1
6	90 DEG ELBOW - BRASS	01226-C	A4007058
7	TEE HEAD - BRASS	01603-C	A4006820
8	90 DEG ELBOW W/ SCRAPER - BRASS	01227-C	A4007059
9	EXTENSION TUBE – 12"	01230-12	A3031743-1
10	BLOWPIPE – 12"	01313-12	A4007476-1

Order Configuration

Fill in the blanks with your desired specifications to identify the part number to order. For custom configurations, email us at sales_columbus@lincolnelectric.com.

090 -
 A B C

A – HOSE OPTIONS

- 0 – Without Hoses
- 1 – With 8 Foot Hoses

B – TIP OPTIONS

- 0 – 90 Deg Elbow
- 1 – 90 Deg Elbow w/ Scraper
- 4 – Stub Nose
- 5 – Tee Head

C – EXTENSION LENGTH OPTIONS

- 01 – Stub Nose
- 12 – 12 Inches Long
- 16 – 16 Inches Long
- 18 – 18 Inches Long
- 24 – 24 Inches Long
- 36 – 36 Inches Long
- 48 – 48 Inches Long

Submit Your Order

To submit orders or inquire about the right configuration for you, email us at sales_columbus@lincolnelectric.com.

We sincerely appreciate your business!

**LINCOLN®
ELECTRIC**

Automation