

SERIES HPI 721/741

HIGH PURITY SINGLE-STAGE BARSTOCK REGULATOR



Model shown (HPI-741-R-145-000-A)
with additional accessories to be ordered separately

KEY FEATURES

Model HPI 741 is a regulator for applications where a slight rise in delivery pressure from full to empty cylinder can be tolerated.

- Recommended for purity levels of grade 6.0 (99.9999) and higher
- Stainless steel version HPI 741 applicable for corrosive gases after prior confirmation of the material's compatibility*
- Hastelloy®** C276 diaphragm eliminates contamination from diffusion or outgassing
- One-piece encapsulated seat design includes a sintered filter to protect the seat from particulate contamination
- Brass nickel-plated bonnet barstock or 316L stainless steel as optional
- 316L stainless steel body for HPI 741, brass chrome-plated body for HPI 721
- 1×10^{-9} mbar l/s He inboard helium leak rate to maintain gas purity levels
- 1/8" NPT thread on the bonnet venting for safety
- Maximum inlet pressure 300 bar (4350 psig)
- Safety relief valve as standard

Applications »

High purity gas applications
Research sample systems gases
Process analyzer gases
Gas chromatography
EPA protocol gases
Laser gas systems
Emission monitoring systems



* Please check the material's compatibility in our Specialty Gas catalog.
** Hastelloy® is a registered trademark name of Haynes International, Inc

TECHNICAL DATA

Type	Single-stage cylinder regulator
Purity	Up to 6.0
Inlet pressure	Max. 300 bar (4350 psig) For Acetylene: max. 25 bar (362 psig)
Outlet pressure	1,5/2/4/10/20 bar (21/29/58/145/290 psig) For Acetylene: max. 1,5 bar (21 psig)
Flow capacity	Kv = 0,0688 [Cv = 0,08]
Gauges	49 mm dual scale (bar/psig) 316L stainless steel (HPI741) or chrome-plated brass (HPI 721)
Oxygen use	Suitable
Inlet/Outlet ports	6x 1/4" FNPT
Weight	1,32 kg
Safety relief valve	Included


MATERIALS

Body	316L stainless steel barstock (HPI 741) or nickel-plated brass barstock (HPI 721)
Bonnet	Nickel-plated brass barstock or 316L stainless steel as optional
Diaphragm (regulator)	Hastelloy®*** C276
Nozzle	316L stainless steel (HPI 741) or brass (HPI 721)
Seat	PTFE Teflon®***
Seals	PTFE Teflon®***
Filter	Sintered stainless steel - 10 micron (HPI 741) or nickel-plated bronze - 25 micron (HPI 721)
Adjusting Knob	ABS plastic
Safety relief valves	316L SS (HPI 741) or brass nickel plated (HPI 721)

** Hastelloy® is a registered trademark name
 of Haynes International, Inc
 *** Teflon® is a registered trademark of
 The Chemours Company


PRODUCT CONFIGURATION

MODEL	MATERIAL	INLET CONFIGURATION		OUTLET PRESSURE	INLET CONNECTION		OUTLET CONFIGURATION	OPTIONS		GAS TYPE
HP 721	Nickel-plated brass	Right	R	0 - 1 bar 0 - 15 psig	015	1/4" FNPT	000	1/4" FNPT	A He leak cert. (inboard)	2 Please specify
HP 741	Stainless steel			0 - 2 bar 0 - 29 psig	029	DIN 477	D...	1/4" FNPT diaphragm valve	B No gauges	3
				0 - 4 bar 0 - 58 psig	058	CGA	C...	1/4" MNPT nipple	C With relief valve (standard)	4
				0 - 10 bar 0 - 145 psig	145	AFNOR	NF...	1/4" tube fitting	D 60 bar inlet gauge	6
				0 - 20 bar 0 - 290 psig	290	BS341	BS...	1/8" tube fitting	E Wall Bracket	P
Other options upon request, please contact us				0 - 34 bar 0 - 500 psig	500	UNI	U...	6 mm tube fitting	F Hastelloy® diaphragm	HA
						NEN 3268	N...	8 mm tube fitting	G Stainless steel bonnet	SB
						ISO 5145	I...	10 mm tube fitting	H Panel Nut	PN
For example:										
HPI 721			R		145	D 6			BF	4 Ar

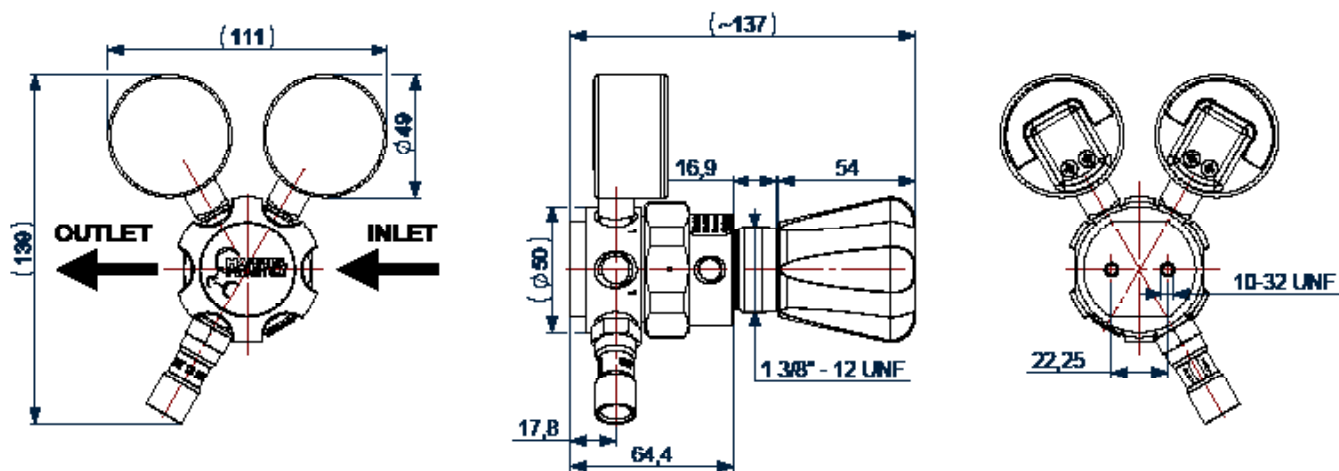

FLOW CHARTS

HPI-721 / 741 flow chart

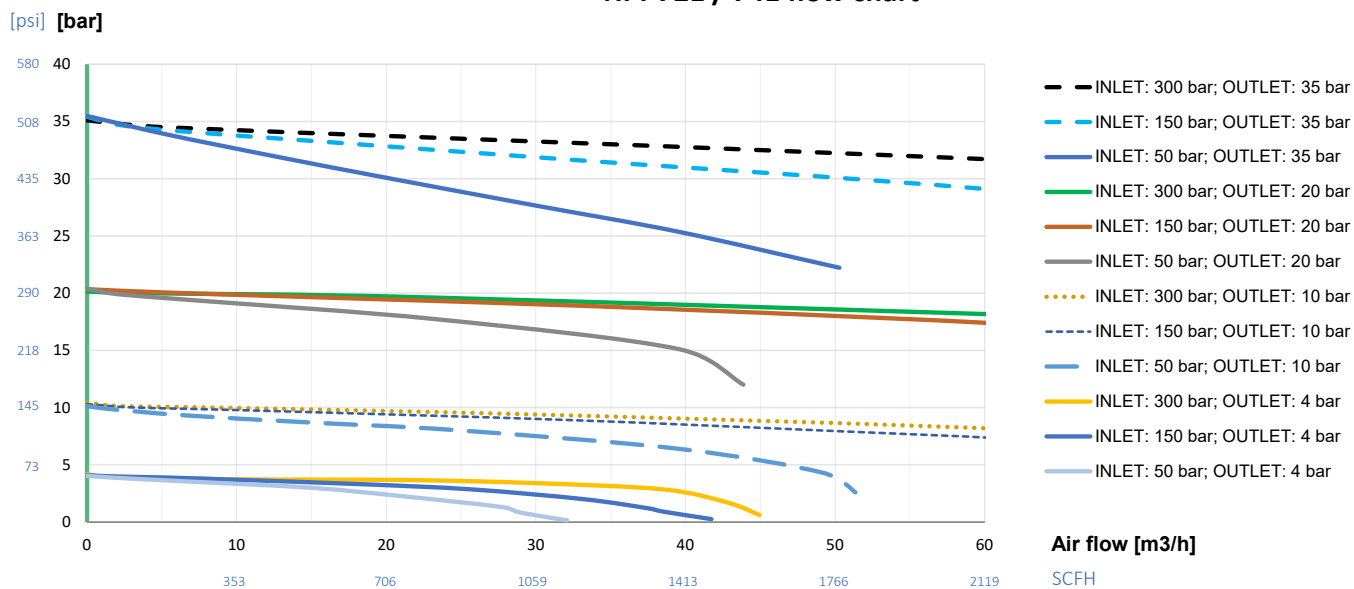

NOTES

CUSTOMER ASSISTANCE POLICY

The business of Lincoln Electric is manufacturing and selling high quality welding equipment, automated welding systems, consumables, and cutting equipment. Our challenge is to meet the needs of our customers, who are experts in their fields, and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or technical information about their use of our products. Our employees respond to inquiries to the best of their ability based on information and specifications provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment, or to provide engineering advice in relation to a specific situation. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or communications. Moreover, the provision of such information or technical information does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or technical information, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose or any other equivalent or similar warranty is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the definition of specifications, and the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.



Contact Harris for pricing and custom configurations

+48 74 646 23 52

marketingharris@lincolnelectric.eu

Harris Products Group
ul. Strefowa 8, 58-200 Dzierżoniów, Poland
www.harrisproductsgroup.eu