


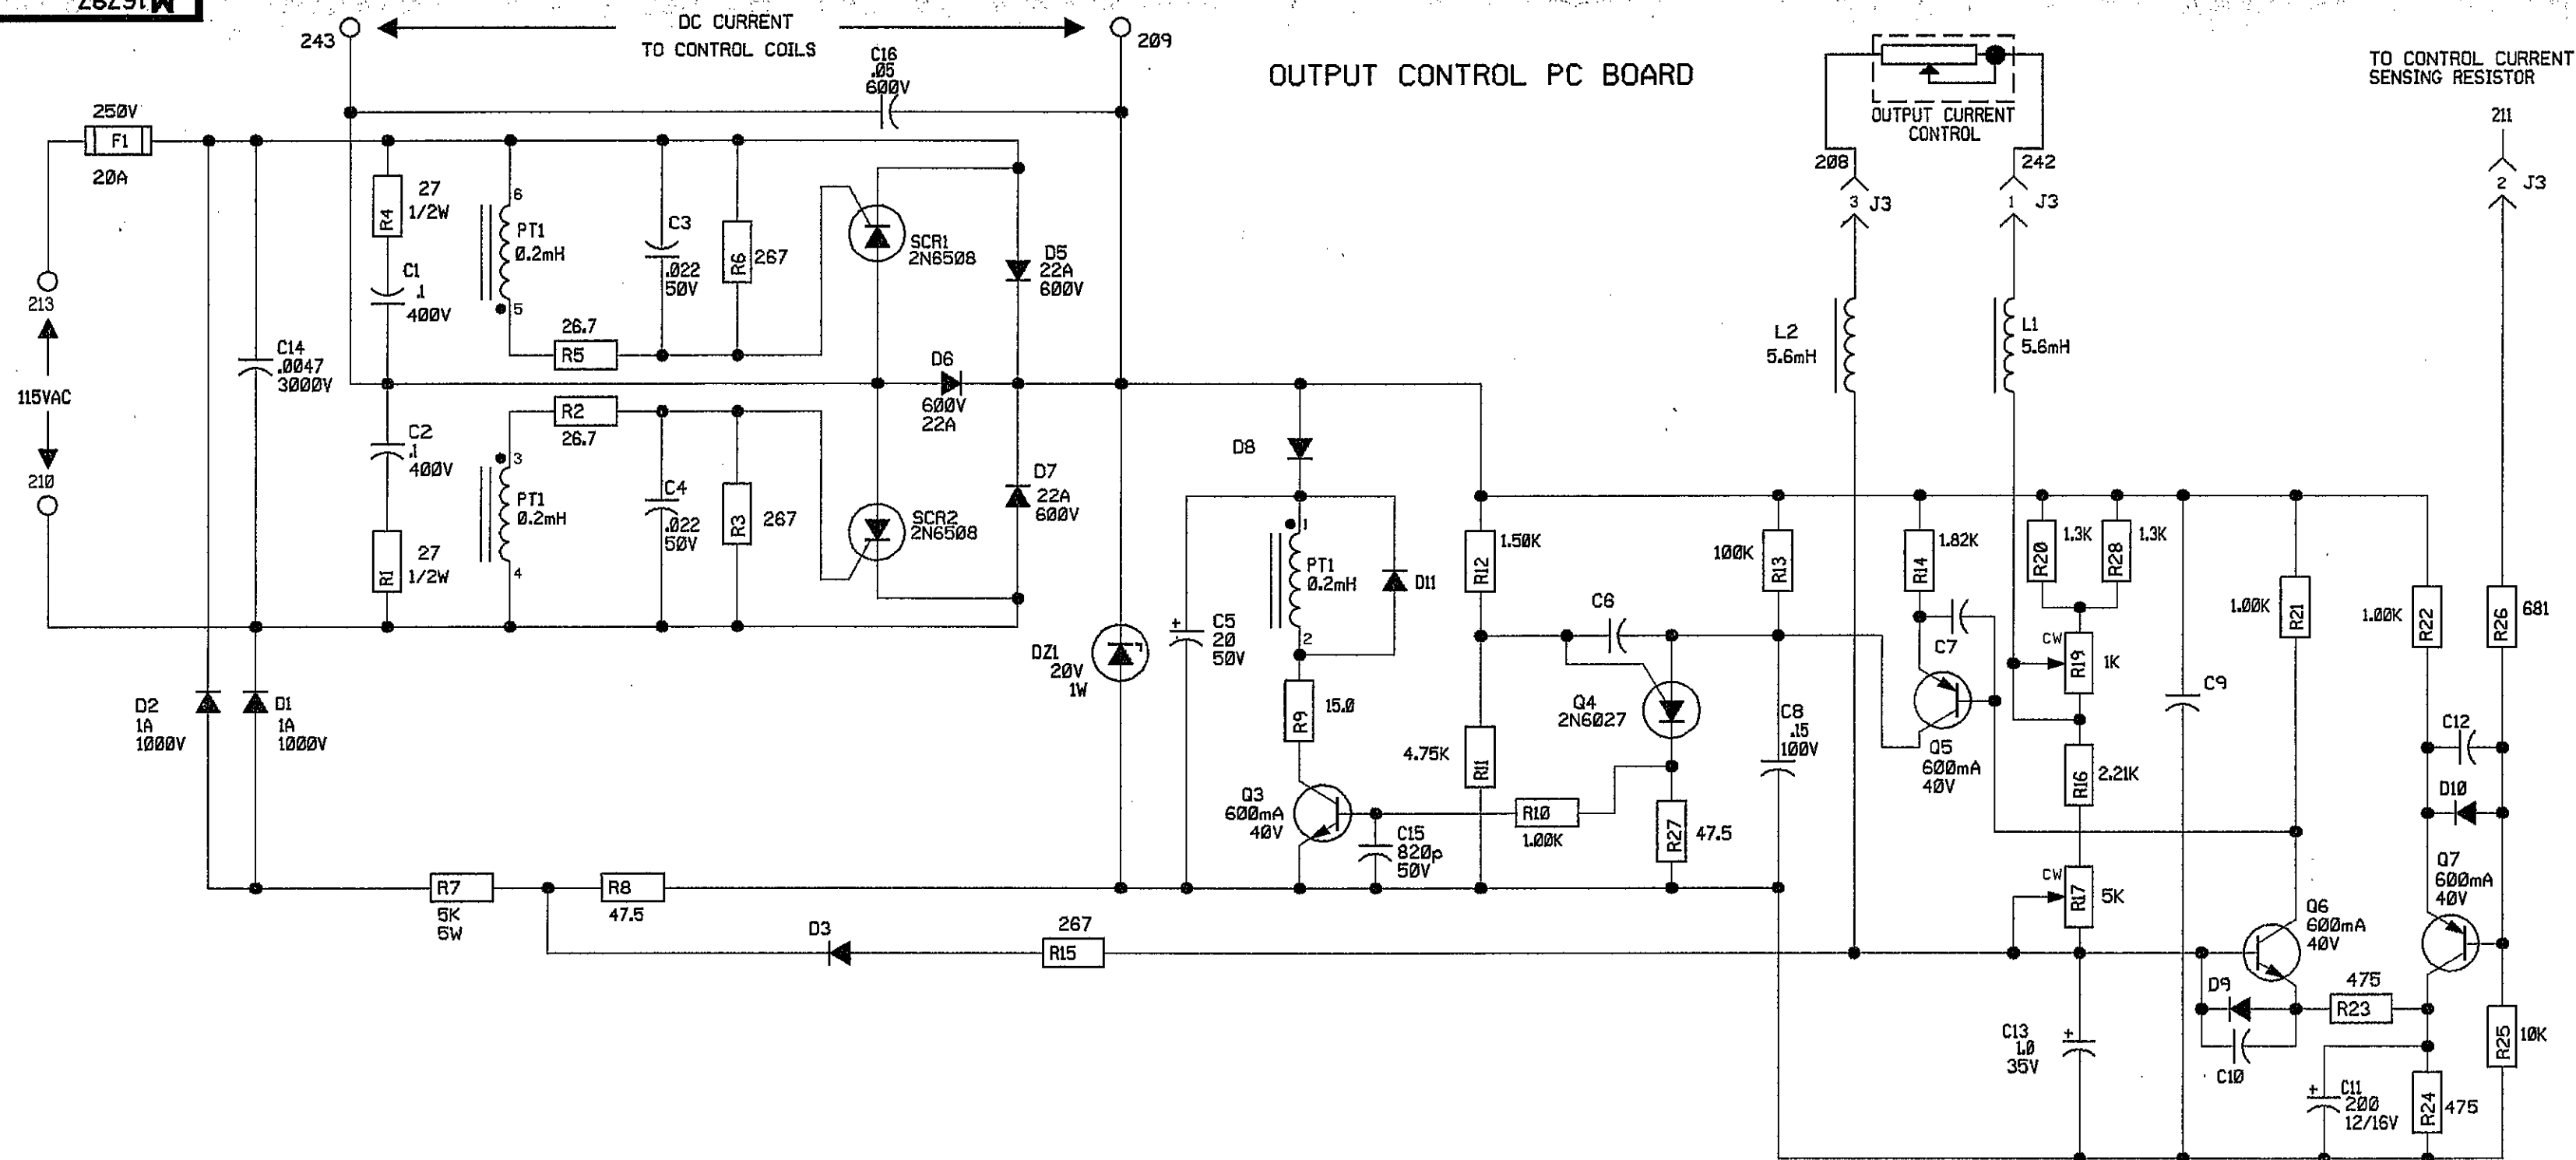

GENERAL INFORMATION

ELECTRICAL SYMBOLS PER E1537
CAPACITORS = MFD (.022/50V UNLESS OTHERWISE SPECIFIED)
RESISTORS = Ohms (1/4W UNLESS OTHERWISE SPECIFIED)
DIODES = 1A, 400V (UNLESS OTHERWISE SPECIFIED)

LABELS

-  SUPPLY VOLTAGE NET .
 POWER SUPPLY SOURCE POINT
 COMMON CONNECTION
 FRAME CONNECTION
 EARTH GROUND CONNECTION

FILE NAME: M16797_3FA

NOTES :

N.A. SINCE COMPONENTS OR CIRCUITRY ON A PRINTED CIRCUIT BOARD MAY CHANGE WITHOUT AFFECTING THE INTERCHANGEABILITY OF A COMPLETE BOARD, THIS DIAGRAM MAY NOT SHOW THE EXACT COMPONENTS OR CIRCUITRY OF CONTROLS HAVING A COMMON CODE NUMBER.

UNLESS OTHERWISE SPECIFIED TOLERANCE
ON HOLES SIZES PER E-2056
ON 2 PLACE DECIMALS IS + .02
ON 3 PLACE DECIMALS IS + .002
ON ALL ANGLES IS + .5 OF A DEGREE
MATERIAL TOLERANCE ("C") TO AGREE
WITH PUBLISHED STANDARDS

Ch'ge.Sht.No.
3-27-9
3-4-94

THE LINCOLN ELECTRIC CO.
CLEVELAND, OHIO U.S.A.

DR. MLD/RT SCALE NONE
DATE 10/11/9

EQUIP. TYPE	TIG 250/250 CONTROL BOARD
----------------	---------------------------

SUBJECT	SCHEMATIC
---------	-----------

SHT. NO. **M 16797**

AUSTRALIA _____ CANADA _____ FRANCE _____