


### SCR CONTROL BOARD

FOR SCR CONTROL BOARDS G1687-2 OR HIGHER, USE LBS32 SCHEMATIC FOR COMPONENT VALUES AND CIRCUIT CONNECTIONS.

### GENERAL INFORMATION

- ELECTRICAL SYMBOLS PER E-1537.
- CAPACITORS = MFD
- RESISTORS = OHMS (1/2 WATT UNLESS OTHERWISE SPECIFIED)
- DIODES = 1AMP, 400V (UNLESS OTHERWISE SPECIFIED)
- OP AMP'S = LM124 (UNLESS OTHERWISE SPECIFIED)
- ▽ = COMMON CONNECTIONS (NOT COMMON TO EACH OTHER)
- A THRU G = TEST POINTS
- J, K, L & N = SOURCE POINT CIRCUIT LOCATION

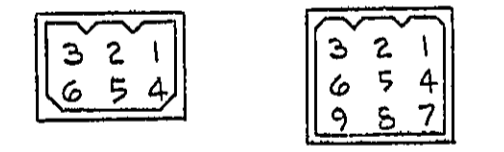

CONNECTORS J2, J3, J5 & J6 CONNECTORS J1 & J4 AS VIEWED FROM COMPONENT SIDE OF BOARD.

### NOTES

N.A. SINCE COMPONENTS OR CIRCUITRY ON A PRINTED CIRCUIT BOARD MAY CHANGE WITHOUT AFFECTING THE INTERCHANGEABILITY OF A COMPLETE BOARD, THIS DIAGRAM MAY NOT SHOW THE EXACT COMPONENTS OR CIRCUITRY OF CONTROLS HAVING A COMMON CODE NUMBER.