


LEFT SIDE OF MACHINE

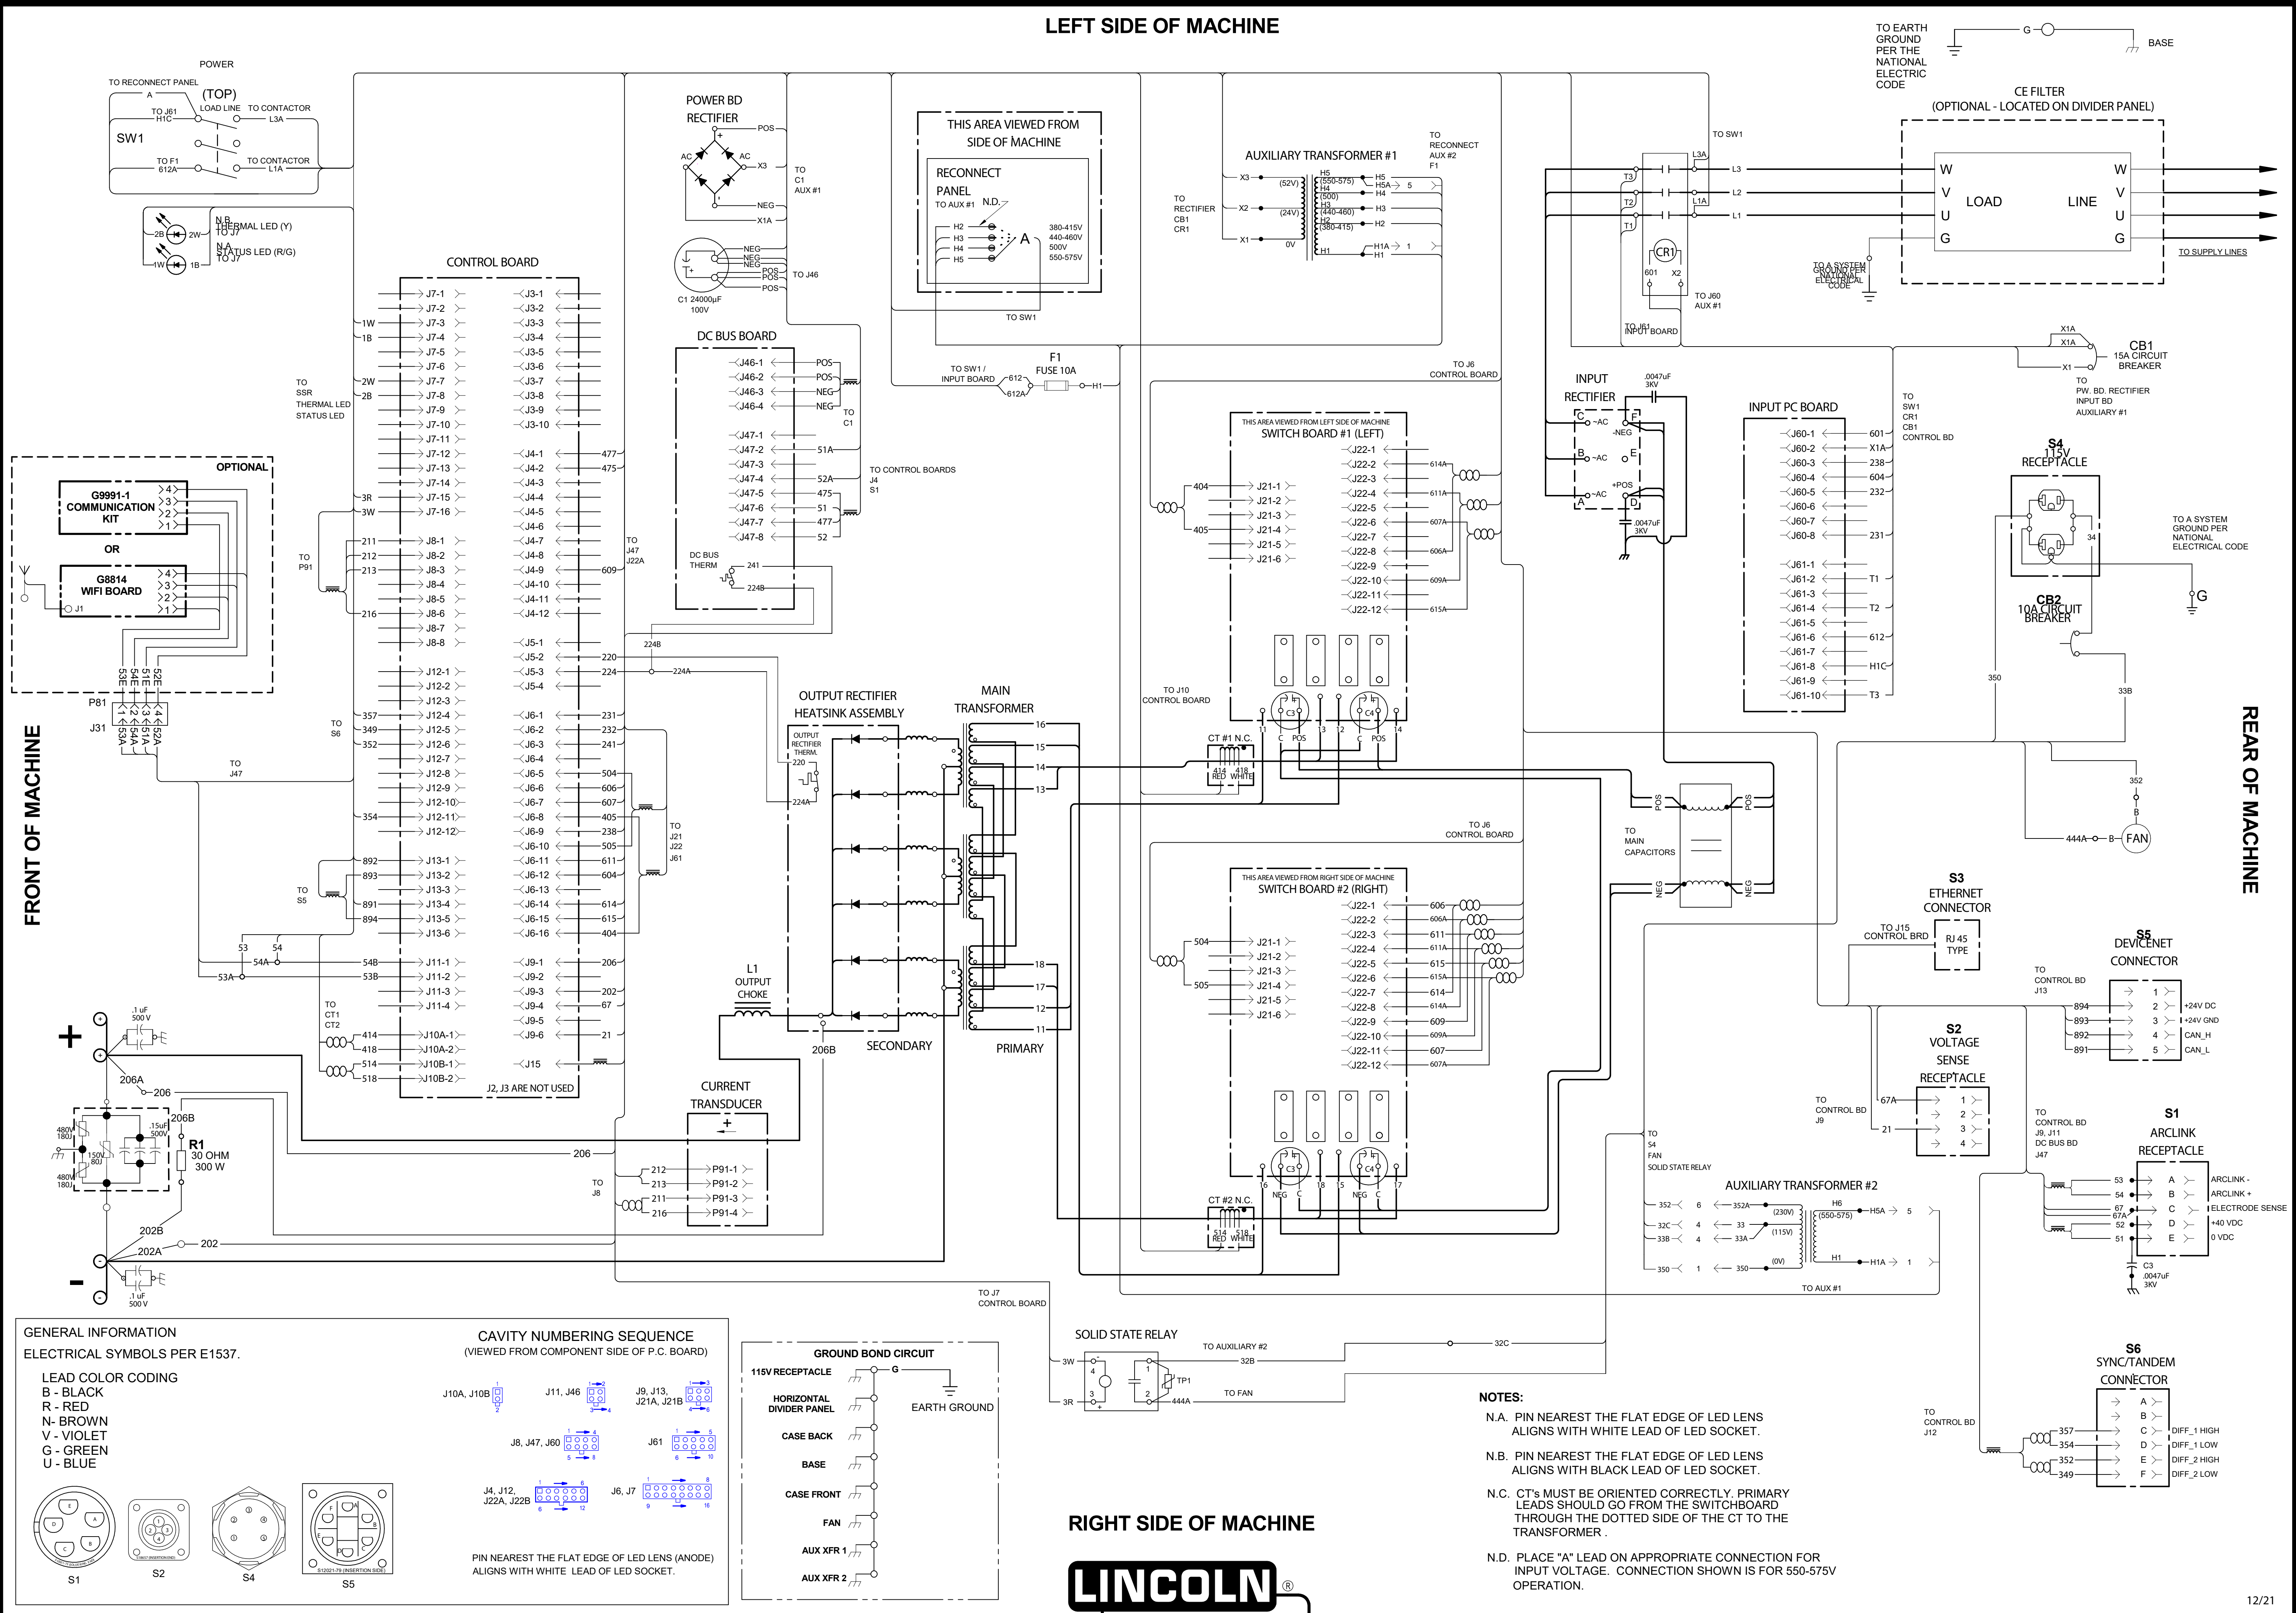

**GENERAL INFORMATION**  
ELECTRICAL SYMBOLS PER E1537.

**LEAD COLOR CODING**  
B - BLACK  
R - RED  
N - BROWN  
V - VIOLET  
G - GREEN  
U - BLUE


**CAVITY NUMBERING SEQUENCE**  
(VIEWED FROM COMPONENT SIDE OF P.C. BOARD)

**GROUND BOND CIRCUIT**

**NOTES:**

- N.A. PIN NEAREST THE FLAT EDGE OF LED LENS ALIGNS WITH WHITE LEAD OF LED SOCKET.
- N.B. PIN NEAREST THE FLAT EDGE OF LED LENS ALIGNS WITH BLACK LEAD OF LED SOCKET.
- N.C. CT'S MUST BE ORIENTED CORRECTLY. PRIMARY LEADS SHOULD GO FROM THE SWITCHBOARD THROUGH THE DOTTED SIDE OF THE CT TO THE TRANSFORMER.
- N.D. PLACE "A" LEAD ON APPROPRIATE CONNECTION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 550-575V OPERATION.

RIGHT SIDE OF MACHINE

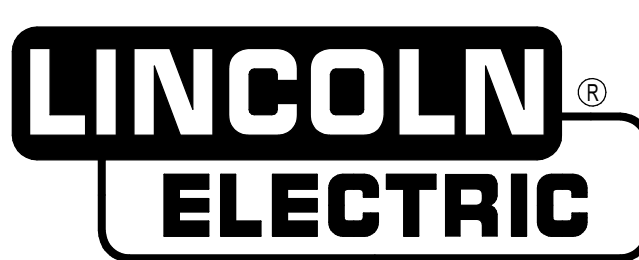

CLEVELAND, OHIO, U.S.A.