


LEFT SIDE OF MACHINE

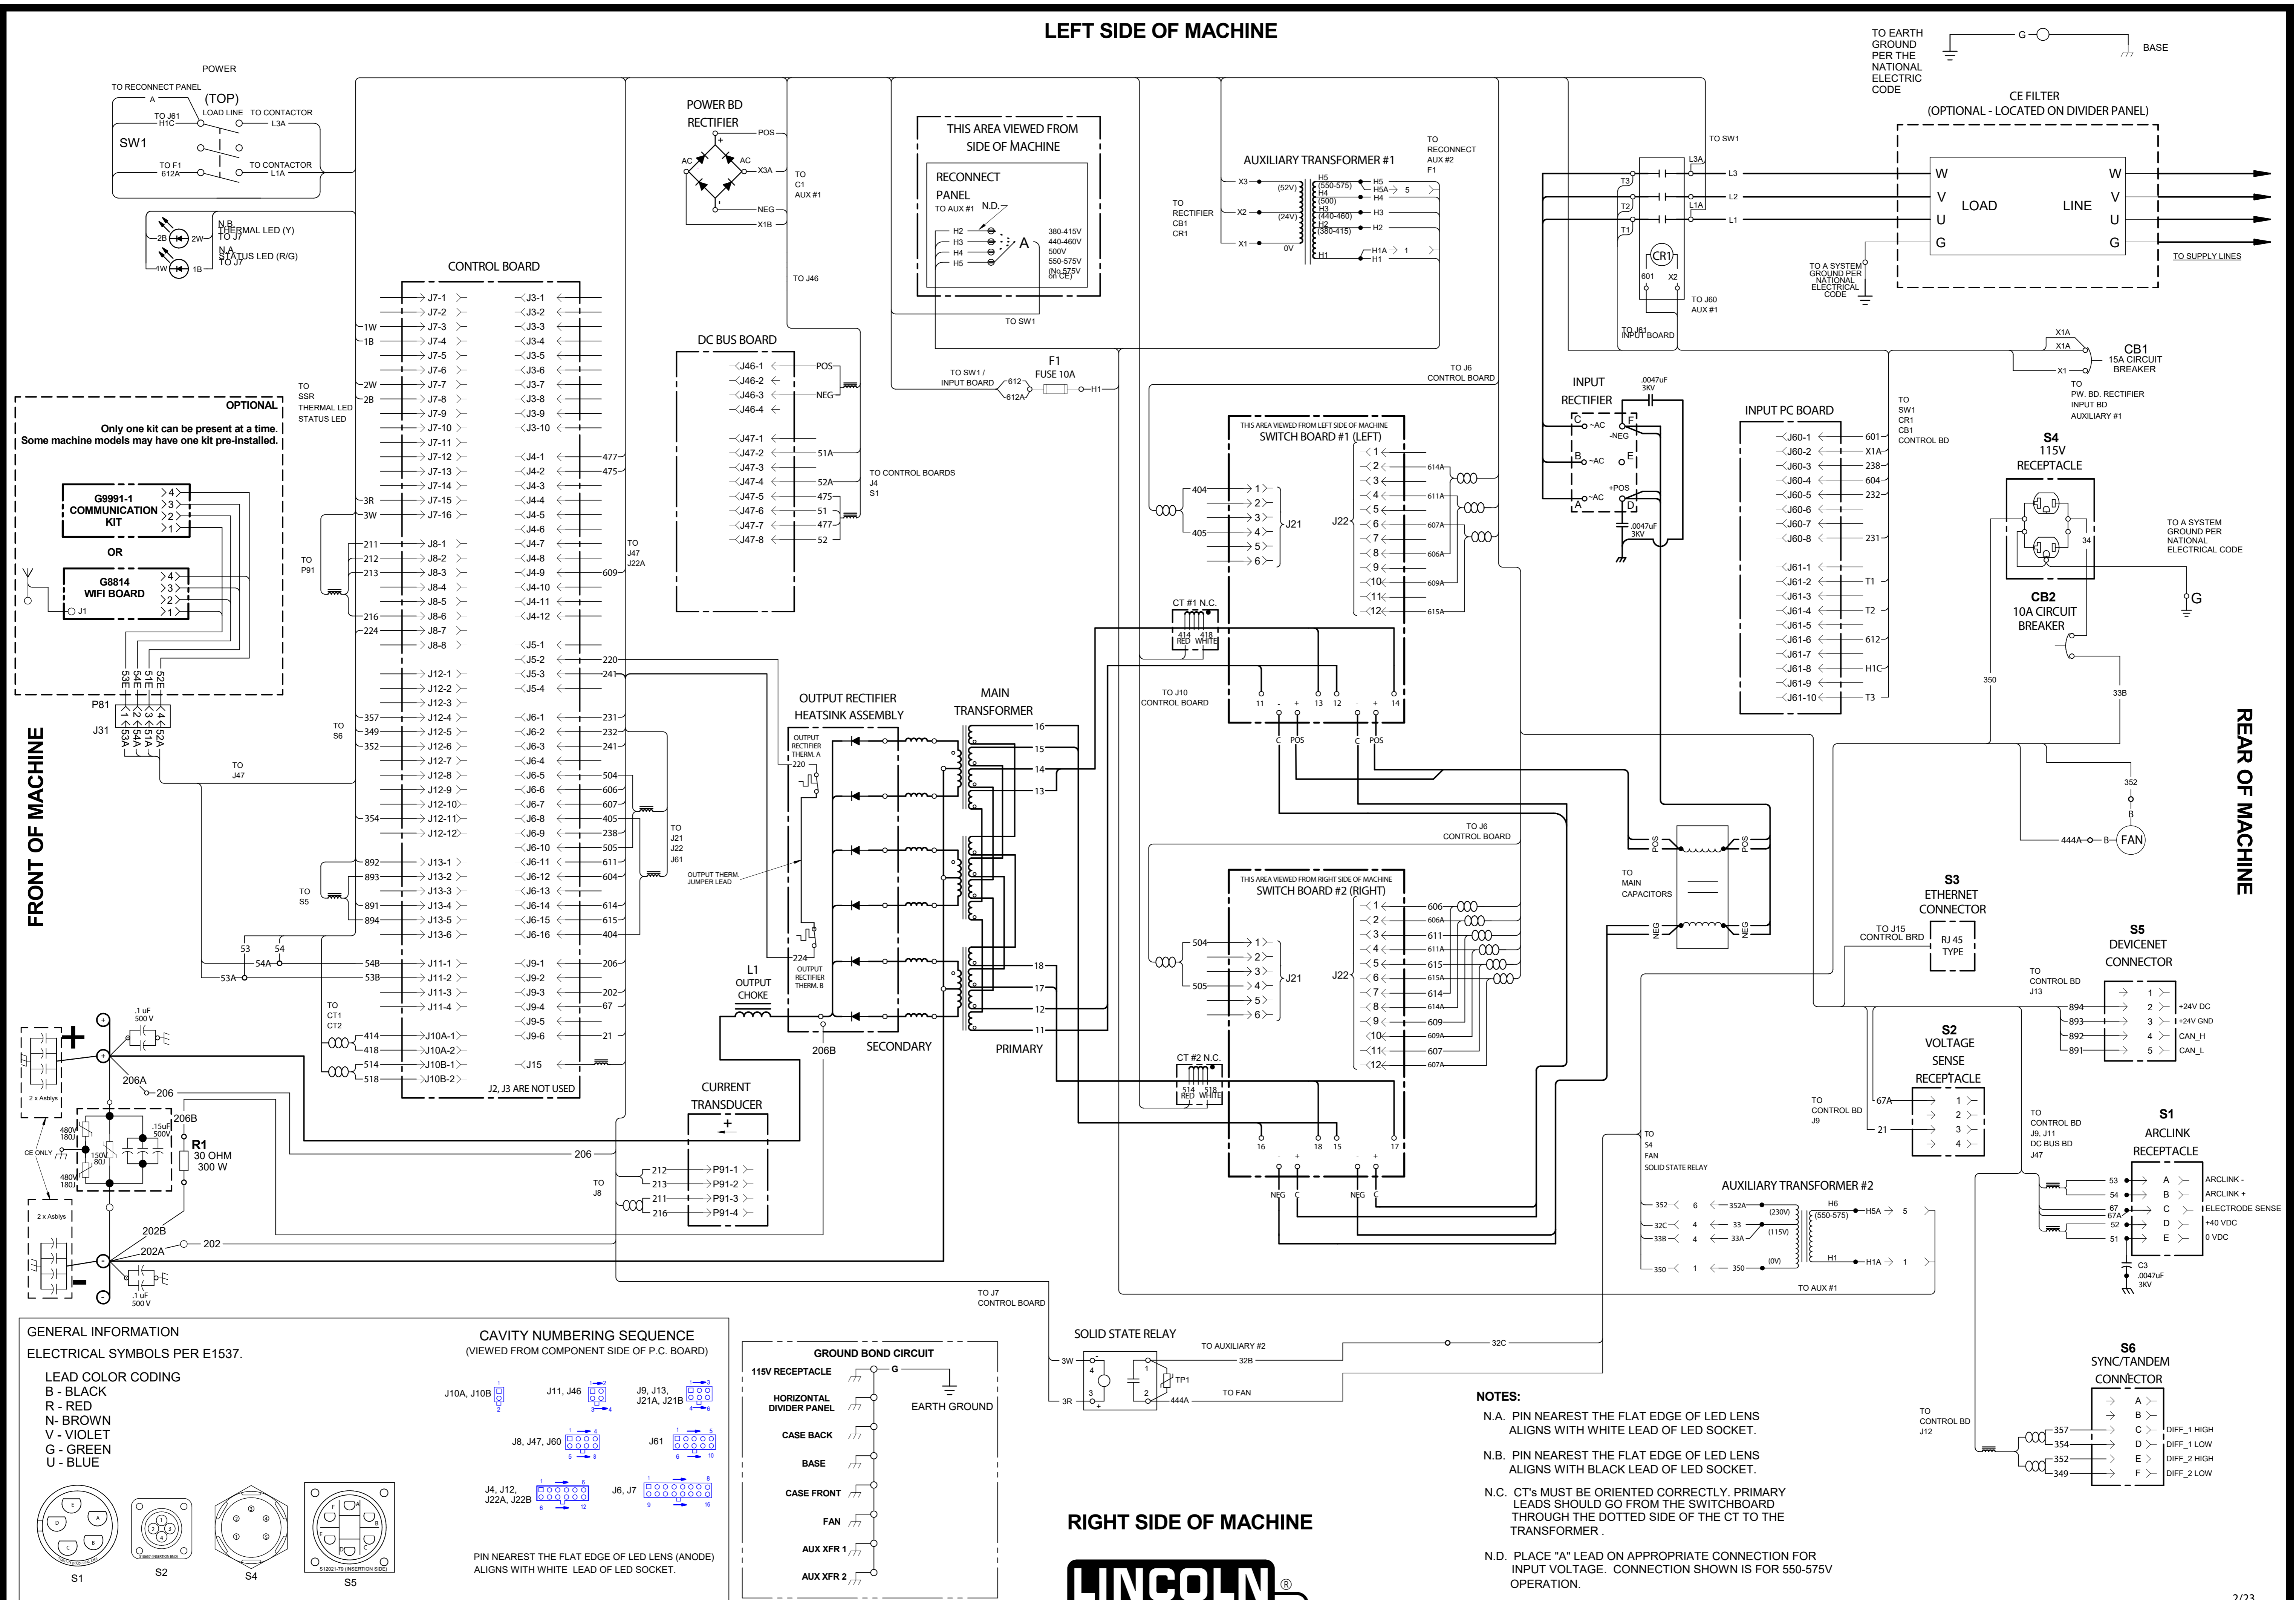

FRONT OF MACHINE

REAR OF MACHINE

**GENERAL INFORMATION**  
ELECTRICAL SYMBOLS PER E1537.

**LEAD COLOR CODING**  
B - BLACK  
R - RED  
N - BROWN  
V - VIOLET  
G - GREEN  
U - BLUE

**CAVITY NUMBERING SEQUENCE**  
(VIEWED FROM COMPONENT SIDE OF P.C. BOARD)

PIN NEAREST THE FLAT EDGE OF LED LENS (ANODE) ALIGNS WITH WHITE LEAD OF LED SOCKET.

**GROUND BOND CIRCUIT**

**RIGHT SIDE OF MACHINE**

CLEVELAND, OHIO, U.S.A.

- NOTES:**
- N.A. PIN NEAREST THE FLAT EDGE OF LED LENS ALIGNS WITH WHITE LEAD OF LED SOCKET.
  - N.B. PIN NEAREST THE FLAT EDGE OF LED LENS ALIGNS WITH BLACK LEAD OF LED SOCKET.
  - N.C. CT'S MUST BE ORIENTED CORRECTLY. PRIMARY LEADS SHOULD GO FROM THE SWITCHBOARD THROUGH THE DOTTED SIDE OF THE CT TO THE TRANSFORMER.
  - N.D. PLACE "A" LEAD ON APPROPRIATE CONNECTION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 550-575V OPERATION.