


MODEL 9296

Three Stage - Blanketing Regulator

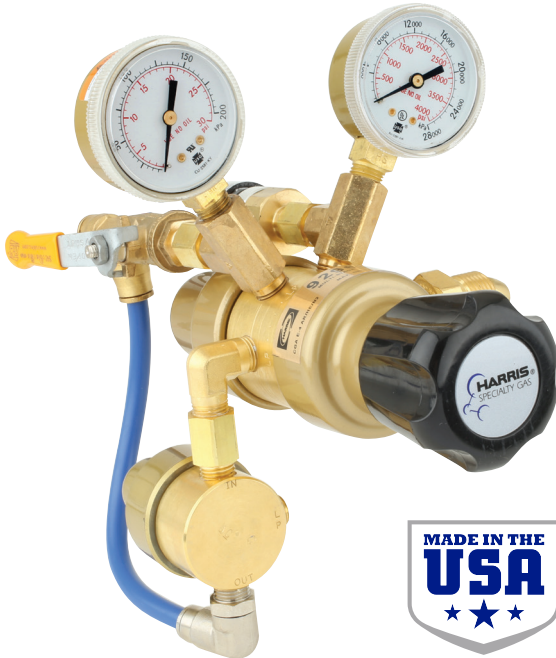

The Model 9296 three-stage pressure regulator is designed to provide continuous control of nitrogen to power transformers from a high pressure cylinder. It has three stages of pressure control from full cylinder pressure (3000 psi) to 0.5 psi. The design also has three 10 micron filters, one for each pressure stage to protect valve seats and provide longer service life.

The pressure switch allows for connection to annunciators and monitoring devices to alert if cylinder pressures become critical.

FEATURES:

- Bypass valve allows for rapid filling of the head space at pressures up to 10 psi
- Accurate, continuous output pressure of 0.5 psi
- Max inlet – 3000 psi
- Neoprene diaphragms for greater sensitivity at low pressures
- One piece encapsulated seat design
- 2" dual scale gauges (psi/kPa)
- Conforms to CGA E-4 Standard for Gas Pressure Regulators

MATERIALS:

Body – Brass
Diaphragm – Nylon Reinforced Neoprene
Valve seat – PTFE
Filter – 10 micron sintered bronze

ORDERING NO.	DELIVERY PRESSURE DELIVERY	OUTLET GAUGE	INLET GAUGE	CGA/INLET FITTING
3301170	0.5 PSI / 10 PSI	30 PSI	4000 PSI	580

NOTE: This item has a minimum order quantity of 6 pieces.

GO TO www.harrisproductsgroup.com/en/specialty-gas-selector.aspx

IT'S IN
OUR DNA

The Harris Products Group
A Lincoln Electric Company
4501 Quality Place - Mason, OH 45040
Customer Service: 1.800.733.4043 PROMPT 2
Fax: 513.754.8778



032018
9700268