


FLEXTEC 500X WIRING DIAGRAM G9590 REV: A



NOTES:
 N.A. PIN NEAREST THE FLAT EDGE OF LED LENS
 ALIGNS WITH WHITE LEAD OF LED SOCKET.
 N.B. PLACE "A" LEAD ON APPROPRIATE CONNECTION FOR
 VOLTAGE. CONNECTION SHOWN IS FOR 460V OPERATION.
 N.C. LEDs ARE ONLY ACTIVE IF VRD IS TURNED ON.
 TURN ON VRD
 BY PLACING DIP SWITCH 5 ON CONTROL BOARD IN THE "ON" POSITION.

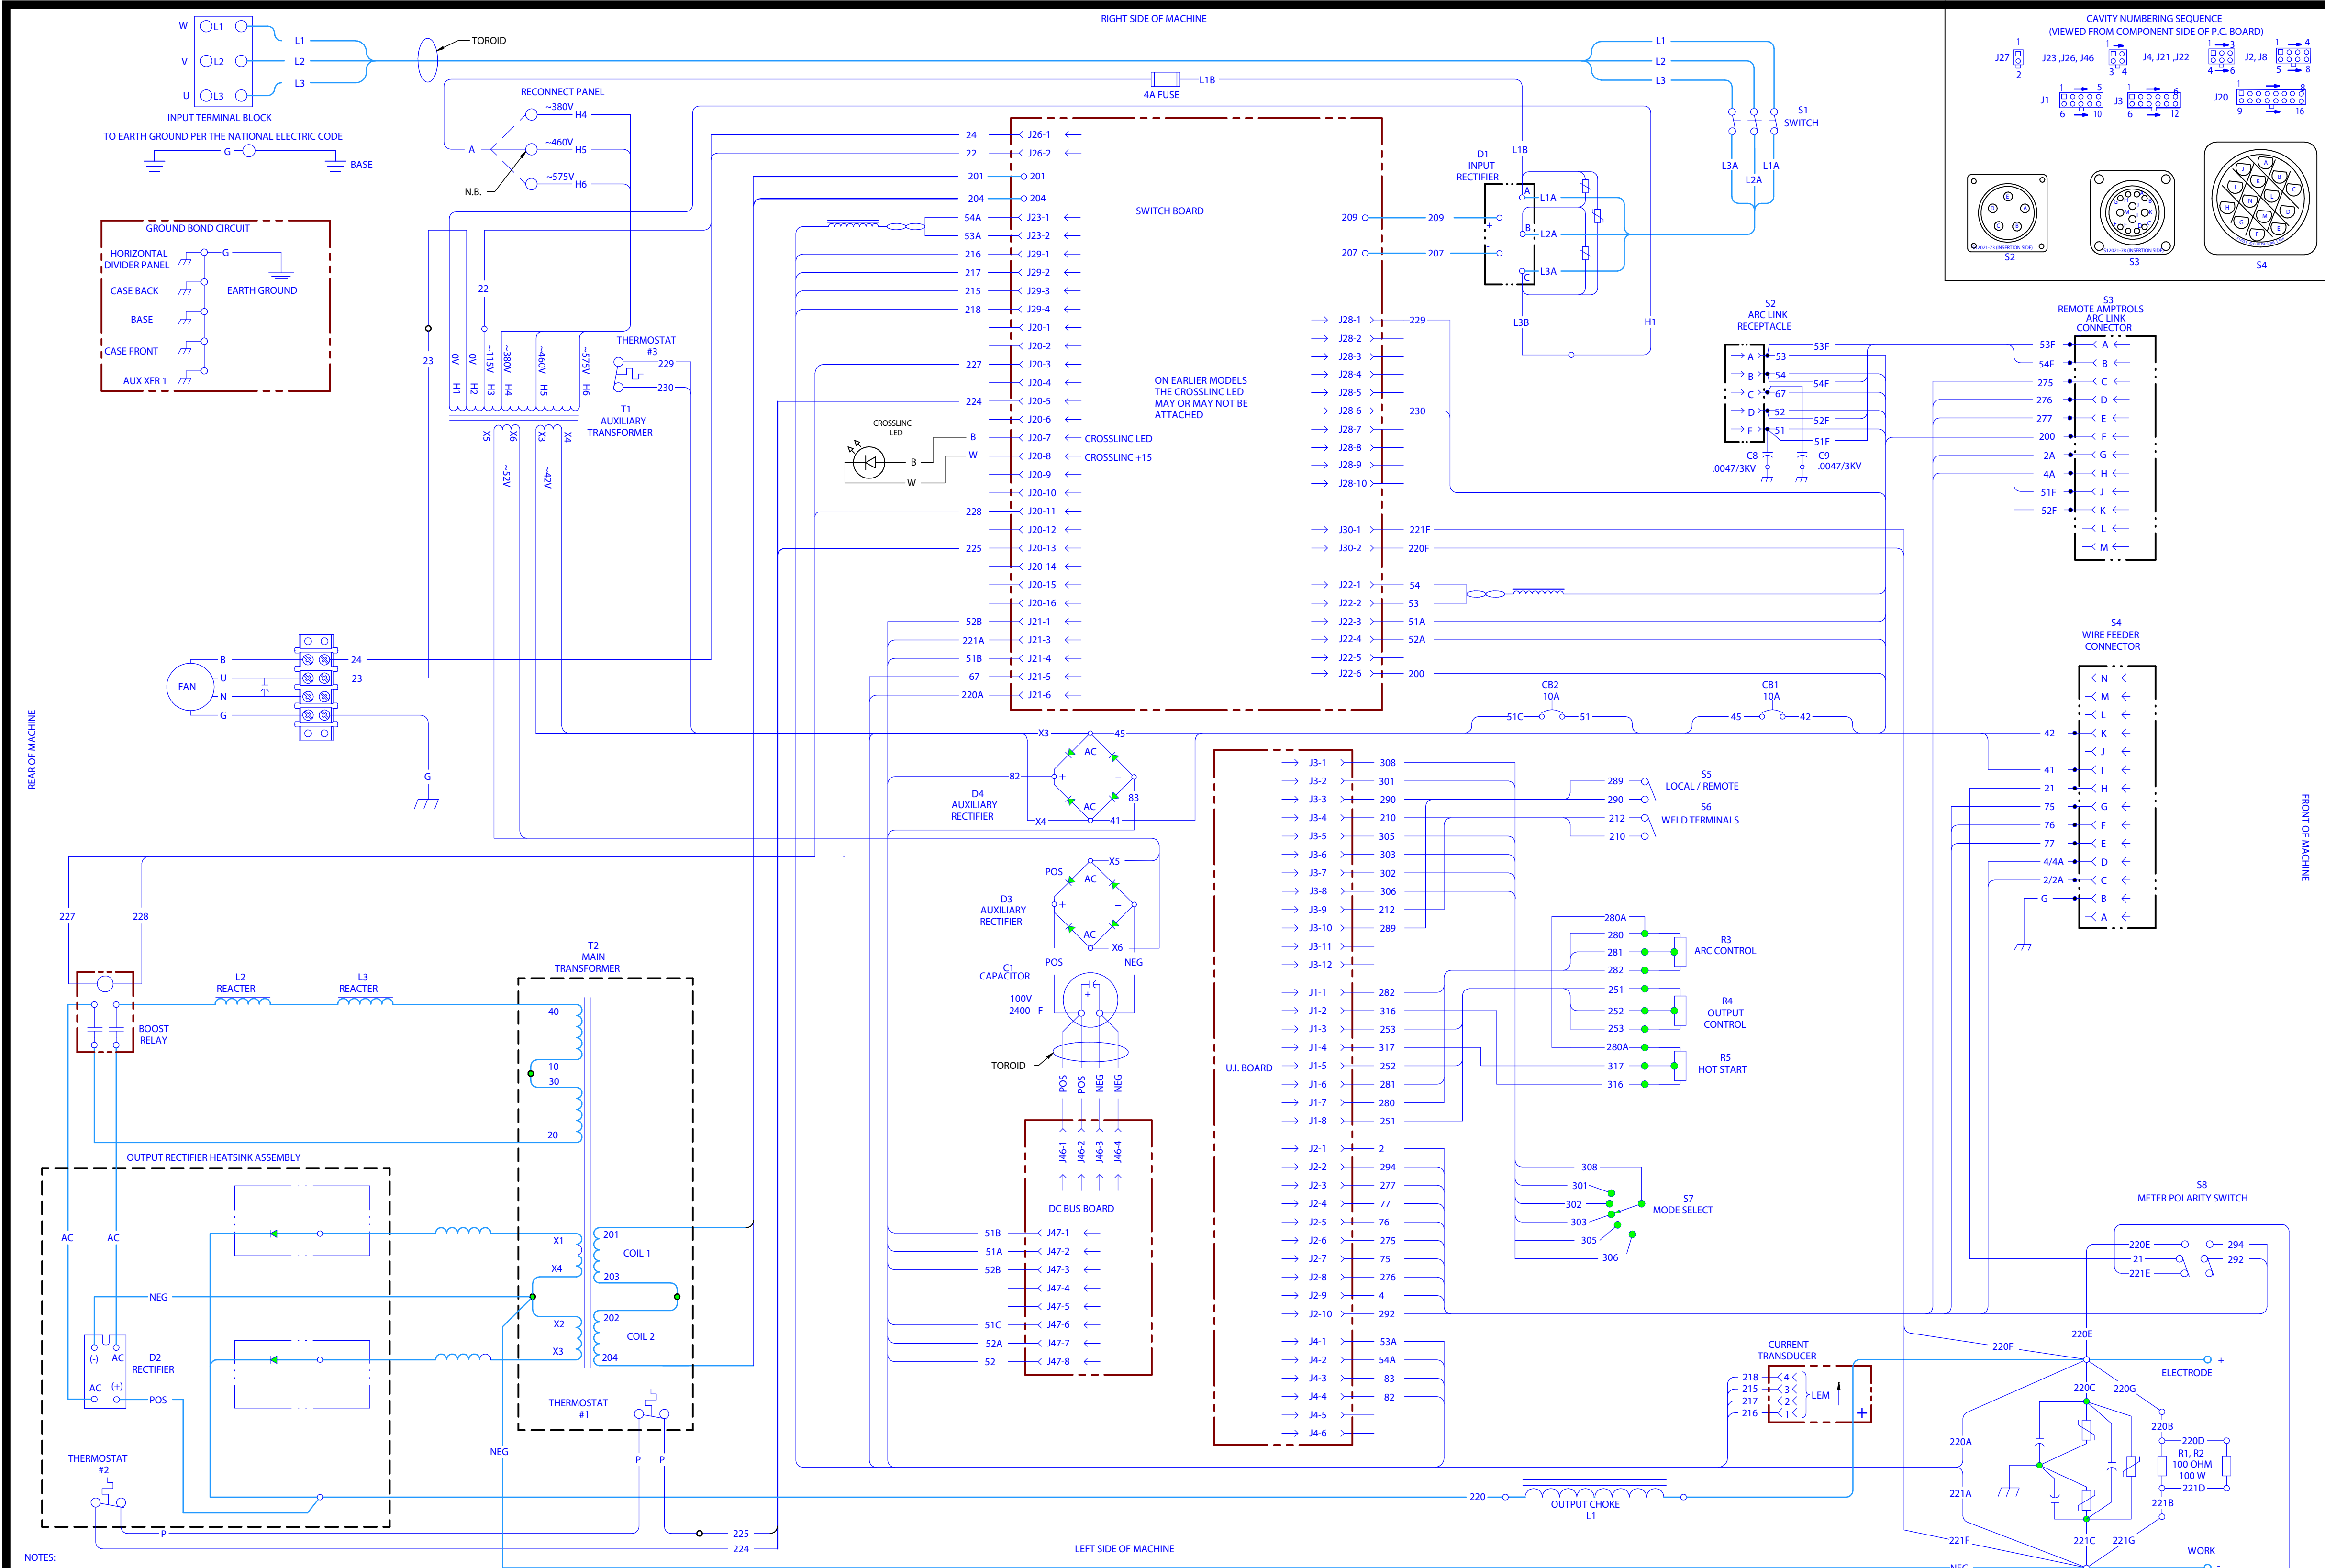