RIMROCK CERAMIC LADLE CUPS

DIE CASTING/FORGING/FOUNDRY EQUIPMENT

OVERVIEW


Rimrock® ceramic ladle cups combine proven Pyrotek® RFM series ceramic technology with an application-specific design to deliver controlled, repeatable molten metal pouring. Purpose-built for robotic ladling systems, these cups help enhance metal flow quality, process consistency, and operational reliability in demanding foundry and die cast environments.

BENEFITS

- Consistent, repeatable molten metal flow to help improve casting quality.
- Custom-designed ceramic geometry optimized for robotic applications.
- Proven Pyrotek® RFM construction for reliable performance in demanding foundry environments.


CAPACITY CHART

	7 lb. Cup	12 lb. Cup	25 lb. Cup	50 lb. Cup	100 lb. Cup
Min. Weight (lbs.) @ 10° Fill	2.69	4.41	11.27	16.41	32.01
Max Weight (lbs.) @ 50° Fill	8.16	13.38	34.20	49.84	97.30

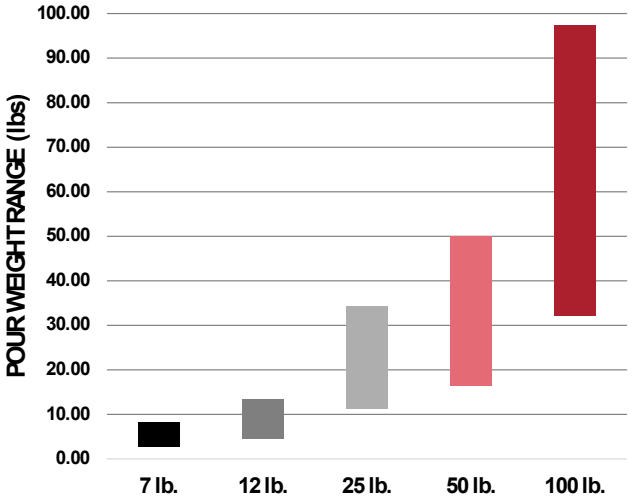

PRODUCT SPECIFICATIONS

	7 lb. Cup	12 lb. Cup	25 lb. Cup	50 lb. Cup	100 lb. Cup
A	214.2 mm [8.43 in]	252.5 mm [9.94 in]	345.3 mm [13.60 in]	391.5 mm [15.42 in]	489.4 mm [19.27 in]
B	133.6 mm [5.26 in]	157.4 mm [6.20 in]	219.1 mm [8.62 in]	235.2mm [9.26in]	294.1 mm [11.58 in]
C	139.7 mm [5.50 in]	139.7 mm [5.50 in]	139.7 mm [5.50 in]	177.8mm [7.00in]	177.8 mm [7.00 in]
D	241.0 mm [9.49 in]	265.8 mm [10.46 in]	325.7 mm [12.82 in]	359.6 mm [14.16 in]	422.9 mm [16.65 in]
E	19.1 mm [0.75 in]	19.1 mm [0.75 in]	19.1 mm [0.75 in]	25.4 mm [1.00 in]	25.4 mm [1.00 in]
F	222.3 mm [8.75 in]	235.8 mm [9.28 in]	271.1mm [10.67 in]	326.8mm [12.87in]	364.1 mm [14.33 in]
G	78.3 mm [3.08 in]	81.3 mm [3.20 in]	88.4 mm [3.48 in]	93.5 mm [3.68 in]	101.0 mm [3.98 in]
H	61.9 mm [2.44 in]	61.9 mm [2.44 in]	61.9 mm [2.44 in]	63.5 mm [2.50 in]	63.5 mm [2.50 in]
I	75.6 mm [2.98 in]	78.0 mm [3.07 in]	84.0 mm [3.31 in]	88.5 mm [3.48 in]	94.8 mm [3.73 in]
J	89.3 mm [3.51 in]	94.2 mm [3.71 in]	106.0 mm [4.17 in]	113.5 mm [4.47 in]	126.0 mm [4.96 in]
K	200.3 mm [7.89 in]	225.1 mm [8.86 in]	285.1 mm [11.22 in]	316.5 mm [12.46 in]	379.8 mm [14.95 in]

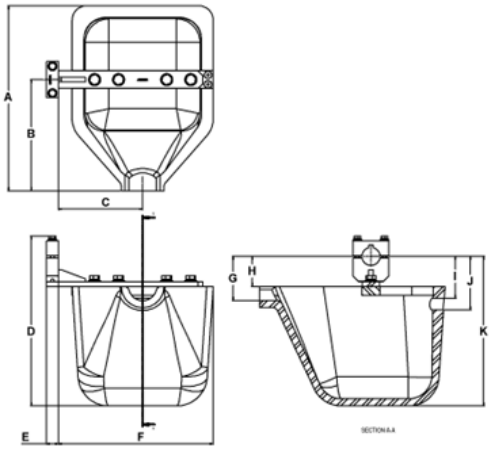

CUSTOMER ASSISTANCE POLICY

The business of Lincoln Electric is manufacturing and selling high quality welding equipment, automated welding systems, consumables, and cutting equipment. Our challenge is to meet the needs of our customers, who are experts in their fields, and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or technical information about their use of our products. Our employees respond to inquiries to the best of their ability based on information and specifications provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment, or to provide engineering advice in relation to a specific situation or application. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or communications. Moreover, the provision of such information or technical information does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or technical information, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose or any other equivalent or similar warranty is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the definition of specifications, and the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Publication LEA-050826TM1-01

© Lincoln Global Inc. All Rights Reserved All trademarks and registered trademarks are the property of their respective owners.

www.lincolnelectric.com/automation

LINCOLN ELECTRIC AUTOMATION