



POWER WAVE 455 (460/575V) WIRING DIAGRAM G3051-2 REV: C

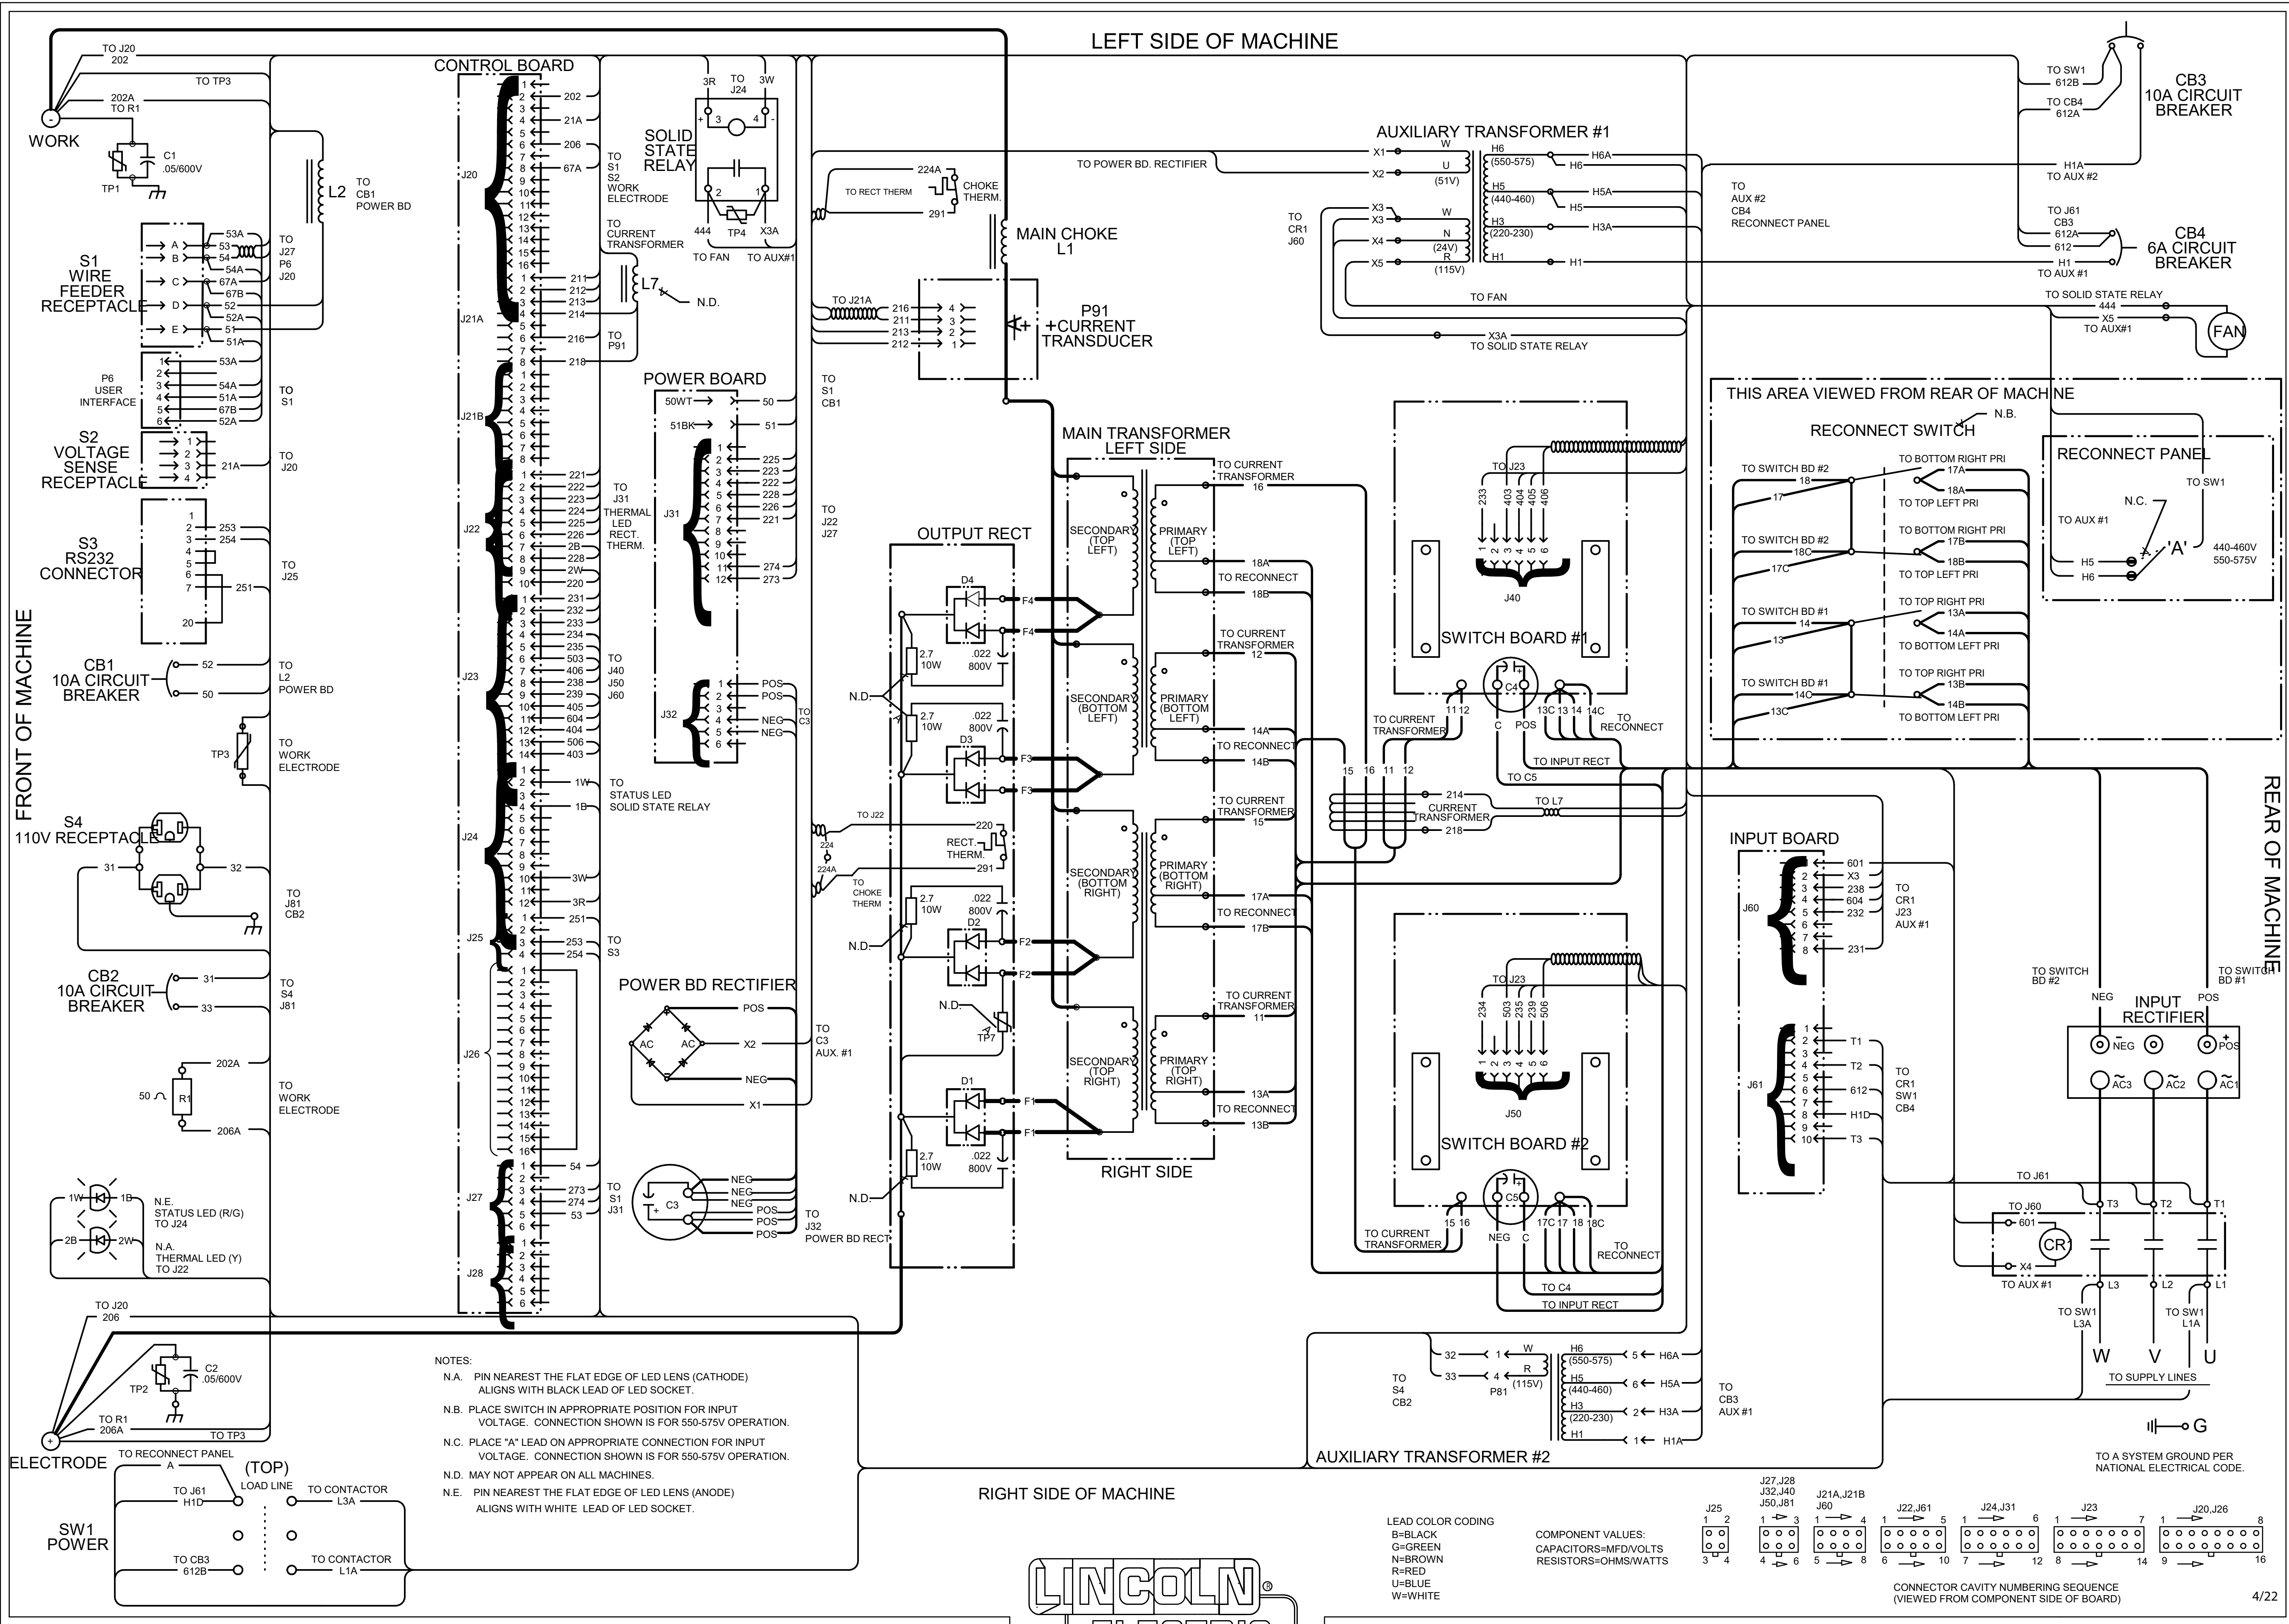

NOTES:
 N.A. PIN NEAREST THE FLAT EDGE OF LED LENS (CATHODE) ALIGNS WITH BLACK LEAD OF LED SOCKET.
 N.B. PLACE SWITCH IN APPROPRIATE POSITION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 550-575V OPERATION.
 N.C. PLACE "A" LEAD ON APPROPRIATE CONNECTION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 550-575V OPERATION.
 N.D. MAY NOT APPEAR ON ALL MACHINES.
 N.E. PIN NEAREST THE FLAT EDGE OF LED LENS (ANODE) ALIGNS WITH WHITE LEAD OF LED SOCKET.

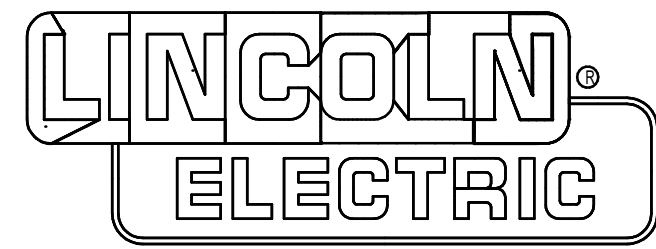

LEAD COLOR CODING
 B=BLACK
 G=GREEN
 N=BROWN
 R=RED
 U=BLUE
 W=WHITE

COMPONENT VALUES:
 CAPACITORS=MFD/VOLTS
 RESISTORS=OHMS/WATTS

