PRESTOJET 45

Plasma Cutting - Anywhere, Anytime

The Prestojet 45 plasma cutting systems are portable enough to carry to any jobsite. Hook up the compressed air, grab the torch and start cutting right away.


Features


- **TFT 2.8" screen** For an easier and user friendly user interface
- **Continuous Output Control** Focus the arc for different material thickness.
- **Touch Start system** Reliable plasma arc initiation without high frequency.
- **Rapid Arc Restrike** Fast cutting through gaps, even expanded metal.
- **Front Panel Purge Control** Makes it easy to set the air flow rate without initiating the plasma arc.
- Gouging and Grid modes (adjustable grid's time)
- **Cool Operation, Long Consumable Life** New electrode and nozzle design save you money in the long run.
- **Added Safety** Our Parts-in-Place system detects correct installation of consumables and torch.
- **Lightweight and Portable** Easily carried by one person.
- **Engine Drive Compatible** Select a Lincoln Electric Outback® or Vantage® to power your Prestojet in remote locations.





CUTTING PERFORMANCE

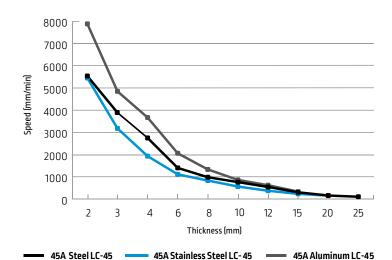

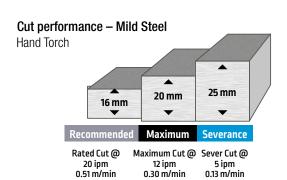

INPUT









Prestojet 45 (W100000322) includes:

- Lincoln Electric LC45 Torch with 6 m cable
- Air regulator and pressure gauge
- Internal water separator
- Work clamp and cable
- Input power cord

Applications

- On site maintenance
- Small construction sites.
- Air ducting installation (HVAC)
- Demolition work
- Rental



RECOMMENDED ACCESSORIES





Lincoln Electric LC45 Replacement Torch Includes 6 mt (10 ft.) torch cableand one set of all required torch expendable parts. Order W100000327




REPLACEMENT TORCH CONSUMABLES

Consumable Wear

- It is normal for the electrode and nozzle to wear during operation.
- Electrodes should typically be replaced when erosion reaches 0.65 mm (0.025 in.).
- A green and erratic arc will indicate end of electrode life.
 The electrode should be immediately replaced.
- It is recommended that the Electrode and Nozzle be replaced as a complete set.

| | PRESTOJET 45 TORCH CONSUMABLES | | | | | | | | |
|-------------------|--|--------------------|--|--------------------------|---|--|--|--|--|
| | Electrode | Gas Distributor | Tip | Retaining Cap | Shield Cap | | | | |
| Product Number | W100000328 W100000341 W100000344 | W100000333 | W10000329 W10000337 W10000331 W10000347 W100000342 | W100000340 W100000345 | W10000330 W10000332 W10000343 W10000336 W10000348 | | | | |

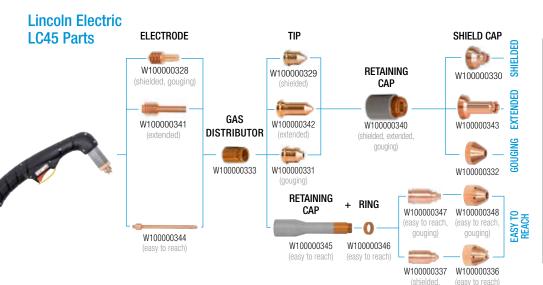







| Part | Quantity | Reference | | |
|-----------------|----------|------------|--|--|
| Electrode | 5 | W100000328 | | |
| Gas distributor | 1 | W100000333 | | |
| Tip 45A | 5 | W100000329 | | |
| Retaining Cap | 1 | W100000340 | | |
| Shield Cap | 1 | W100000330 | | |

Type of cutting




Convenient for the operator, simply drag the nozzle on the plate. Well protected nozzle.



Maximum flexibility and visibility of the plasma stream.



Allowing you to gouge different materials.



SPECIFICATIONS

| Product Name | Product Number | Input Power | Rated Output Current/ Voltage/Duty Cycle | Fuse (delayed) or Circuit Breaker | Pilot Current | Output Range | Air Pressure Required | Air Flow Rate Required | Dimensions H x W x D (mm) | Net Weight Without Torch (kg) |
|-----------------|-------------------|---------------------|--|--------------------------------------|------------------|--|--------------------------|---------------------------|---------------------------------|-------------------------------------|
| PRESTOJET 45 | W100000322 | 120/230/1/ 50/60 | at 230Vac 45A@45% 40A@60% 30A@100% at 120Vac 22A@60% 15A@100% | 16 A | 20 A | 15- 45 A (230Vac) 15- 22 A (120Vac) | 5.0bar – 6,0bar | 200 ±10% l/min | 385 x 215 x 480 | 11.1 |

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company® is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.eu for any updated information

