

FLEXTEC® / DLF - 84 READY-PAK®

FAB SHOP WELDING SYSTEM



Shown: K5922-1 Flextec 350X PowerConnect / DLF-84 Ready-Pak

THE COMPLETE FAB SHOP SYSTEM

The Flextec® / DLF Ready-Pak® systems combine rugged reliability with advanced welding innovation, delivering a complete solution that's easy to order, set up, and operate. With a proven 4-roll drive and seamless Flextec® integration, the DLF-84 sets the standard for simple, dependable wire feeding.

Processes »

CV-MIG, Pulsed MIG, CV-FCAW-G

Applications »

Fabrication Shops
Welding Production Facilities
Education and Training Facilities

Output »



Product Numbers »

K5921-1 - Flextec 350XP / DLF-84 Ready-Pak


K5922-1 - Flextec 350X PowerConnect® / DLF-84 Ready-Pak

K5923-1 - Flextec 500X / DLF-84 Ready-Pak

KEY FEATURES

- » **Ready-to-Weld Packages** – Preassembled systems designed for fast, hassle-free setup and deployment.
- » **Optimized Arc Performance** – Intelligent features such as synergic CV-MIG and Pulsed MIG, along with Auto Settings optimize arc performance for low spatter and improved arc control.
- » **Smart Synergic Control** – Simplified one-knob operation auto-adjusts voltage and wire feed for optimized arc performance.
- » **High-Performance Wire Delivery** – Supports larger-diameter wire at higher speeds for demanding, high-deposition applications.
- » **Pulsed MIG Support** – When paired with a pulse-capable Flextec® power source, delivers lower spatter and greater puddle control for superior arc performance. Now compatible with push-pull guns for aluminum wire feeding.

DLF-84 WIRE FEEDER

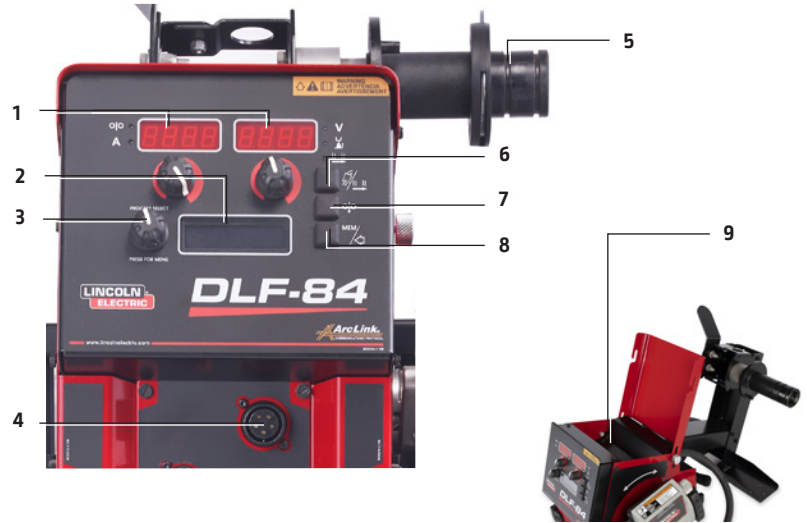

1. Bright digital displays for preset WFS/voltage and actual current/voltage
2. Set up screen for optimum process selection and system settings
3. Weld Mode / Menu selector encoder push button
4. Gun connector (5-pin)
5. Wire reel stand accommodates up to 60-lb spools.
6. Gas purge / trigger interlock - Electronic trigger lock allows for less fatigue during long welds
7. Cold feed for safe loading of wire
8. Memory selection - easily recall up to 4 different weld schedules
9. Storage

ENHANCED WIRE DRIVE SYSTEM

Reliable, High-Speed Feeding

The field-proven feeder brings a robust four-roll drive system to the DLF lineup, delivering faster, more consistent wire feeding performance.

- Patented design for simple, tool-less setup
- Split wire guides provide full wire support and helps eliminates bird nesting.
- Convenient, single drive-roll tension adjustment with visual scale
- Interchangeable brass gun connection for optimal arc stability



Synergic Control - Let the system know the wire type, diameter and shielding gas. From there one knob (WFS) is the only adjustment that is needed. For hotter or faster welds, choose higher WFS, for cooler or smaller welds, choose lower WFS. The system does the rest.

Pulsed MIG Modes - Helps reduce spatter for more productivity, minimize fume, and offer a wider operating range for improved weld puddle control and easier out-of-position welding.

Adaptive Arc - When using the pulsed MIG process, small changes to contact tip to work distance (CTWD) will not affect the bead shape as the adaptive arc works to keep the arc length constant.

Auto Settings - Automatically adjust settings based on workpoint for improved performance and less guesswork.

- Run-in Speed - For smooth starts and reduced spatter
- Pre Flow, Post Flow, Burn Back Timers - For additional weld shielding and quality
- Starting Procedure - Helps provide extra wetting when needed at the beginning of the weld
- Crater Fill - Helps reduce crater at the weld end

Arc Control - Options to fine tune the arc with Pinch/Inductance and Pulse Frequency.

Memory Presets - Save up to 4 custom weld settings and quickly recall based on your application.


Gun Trigger Memory Recall - Easily change between saved weld settings (such as tack settings and weld settings) right at the weld gun, no need to go back to the welder.

Weld Parameter Limits - Customized high & low limits for WFS, V/Trim, and Arc Control to help increase process control and reduce accidental parameter changes.

Weld Mode Lock Out - Customize the weld mode options available to select (ie, only .045 carbon steel pulse, only .035 stainless CV, etc)

PIN Lockout - Restrict system / parameter changes and reduce chance of accidental changes.

Pulsed MIG

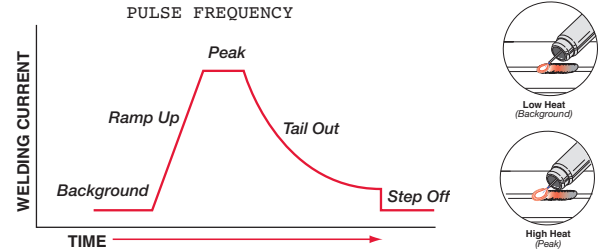

Flextec / DLF-84 Weld Modes

Non-Synergic

FCAW-S
FCAW-G
GMAW (MIG)
MCAW (Metal Core)

	Flextec 350XP / 350X PC	Flextec 500X
Synergic CV		
Steel	.025-.045	0.025 - 3/32
Stainless Steel	.025-.045	0.025 - 3/32
Aluminum	.025-.045	0.025 - 3/32
Metal Core	.035 - 0.52	0.035 - 0.120
Synergic Pulsed*		
Steel	.025-.045	0.025 - 3/32
Stainless Steel	.025-.045	0.025 - 3/32
Aluminum	.025-.045	0.035 - 1/16
Metal Core	.035 - .052	0.035 - 0.120

*Basic pulse modes only. Pulse on pulse Aluminum is not included and the DLF feeder supports only a push gun.

For WFS and size limits with pinion gears please reference the Instruction Manual

FLEXTEC POWER SOURCES

Built for the Fab Shop.

Flextec industrial multi-process welders provide the ideal combination of simplicity, flexibility, and reliability to handle all of your fabrication needs

- Simple, easy-to-use interface. With the Flextec / DLF system, all control is transferred to the DLF wire feeder.
- Flexible, multi-process capabilities
- Reliable, rugged design with trayed and potted pc boards to withstand the harshest fab shop environments
- Smart Fans run only as needed to reduce energy usage
- Industry-Leading Warranty – 5 years of full coverage, including parts and labor, with a fast, streamlined claims process



INDUSTRY LEADING
5-YEAR
STANDARD
WARRANTY

READY-PAK PACKAGES

Ready-Pak® packages comes assembled, shipped on a pallet, and ready to weld in minutes. Welding wire and shielding gas must be ordered separately.



Description	Part Number	Flextec 350XP / DLF-84	Flextec 350X PowerConnect® / DLF-84	Flextec 500X / DLF-84
	Ready-Pak Part #	K5921-1	K5922-1	K5923-1
	Rated Duty Cycle	350A @60%	350A @ 60%	5000A @60%
	Input Voltage	380-575V 3-Phase	200-575V, 1/3-Phase	380-575V 3-Phase
Flextec 350XP	K4272-2	•		
Flextec 350X PowerConnect	K4273-2		•	
Flextec 500X	K3607-1			•
DLF-84 Bench Model	K5287-3	•	•	•
Magnum® Pro Curve HDE 350, 045 15ft. Ready-Pak	K4532-2-10-45	•	•	•
.035-.045 Reversible Drive Roll Kit	KP1696-1	•	•	•
DLF Wire Reel Stand (60-lb)	K5288-1	•	•	•
Inverter and Wire Feeder Cart	K3059-4	•	•	•
Flowmeter/Regulator, 355-2AR-580110	3100211	•	•	•
Locking Foot Kit (Flextec 350X)	K4424-1	•	•	
DLF-Feeder Cart Mounting Bracket	K5959-1	•	•	•
Work/Power Lead Package (Tweco® to Lug/Gc500)	K1803-2	•	•	
Power Lead 3/0 Lug to Lug 10 Ft.	K1842-10			•
Work Lead 10ft W/ Ground Clamp Lug to Lug	K2149-1			•
Foot Kit (Flextec 500x)	K3056-2			•

OPTIONAL DRIVE ROLLS


4-ROLL WIRE DRIVE SYSTEMS

Product Name	Product Number	Description/Wire Size, in [mm]
4-ROLL WIRE DRIVE SYSTEMS		
Solid Wire, Smooth V Groove *Heavy duty tool-steel drive rolls designed for maximum life. Recommended for automated and high WFS applications.	KP1505-030S	0.023-0.030 [0.6-0.8]
	KP1505-035S	0.035 [0.9]
	KP1505-035R*	
	KP1505-040S	0.040 [1.0]
	KP1505-040R*	
	KP1505-045S	0.045 [1.2]
	KP1505-045R*	
	KP1505-052S	0.052 [1.4]
	KP1505-052R*	
	KP1505-1/16S	1/16 [1.6]
KP1505-1	0.035, 0.045 [0.9, 1.2]	
Cored Steel Wire, Knurled V Groove [Knurled V Groove with matching Smooth U Groove]	KP1505-035C	0.030-0.035 [0.8-0.9]
	KP1505-045C	0.040-0.045 [1.0-1.2]
	KP1505-052C ^(B)	0.052 [1.4]
	KP1505-1/16C ^(B)	1/16 [1.6]
	KP1505-7/64H ^{(2)(B)}	7/64 [2.8] Hardfacing

Product Name	Product Number	Description/Wire Size, in [mm]
4-ROLL WIRE DRIVE SYSTEMS		
Cored or Solid Steel Wire, Knurled V Groove	KP1505-068 ^(B)	0.068-0.072 [1.7-1.8]
	KP1505-5/64 ^(B)	5/64 [2.0]
	KP1505-3/32 ^(B)	3/32 [2.4]
	KP1505-7/64 ^{(2)(B)}	7/64 [2.8]
	KP1505-120 ^{(2)(B)}	0.120 [3.2]
Hardfacing Wires, Knurled, Smooth V Groove	KP1505-7/64C	7/64 [2.8]
	KP1505-7/64H ^{(2)(B)}	7/64 [2.8] Hardfacing
Aluminum Wire, Smooth U Groove	KP1507-035A	0.035 [0.9]
	KP1507-040A	0.040 [1.0]
	KP1507-3/64A	3/64 [1.2]
	KP1507-1/16A ^(B)	1/16 [1.6]
	KP1507-3/32A ^(B)	3/32 [2.4]

CONTROL CABLES

An 8ft control cable is included and integrated into the DLF wire feeder. For longer lengths choose a 5-pin digital ArcLink cable extension

Product Name	Product Number	Description	Connection	Use	Length ft (m)
ArcLink Control Cables 	K1543-8	Standard ArcLink® Cable	Male 5-pin to Female 5-pin	ArcLink® compatible Power Wave®, Power Feed®, and Flextec® systems	8 [2.4]
	K4483-8	Ext-Flex ArcLink® Cable			16 [4.9]
	K4483-16				25 [7.6]
	K4483-25				50 [15.2]
	K4483-50				100 [30]
	K4483-100				

FEEDPLATE GUN ADAPTERS

K3344-1	K3345-1 [Included]	K3346-1	K3347-1	K3348-1	K3349-1
Lincoln Electric	Tweco® #2 - #4	Tweco® #5	Miller® guns	OXO® guns	Magnum® Fast-Mate™
Compatible gun connector kit K466-1 K613-1 K613-6 K466-8	Compatible gun connector kit K466-10 K466-2 K466-6	Compatible gun connector kit K613-7 K613-2	Compatible gun connector kit K466-3 K613-3	Also requires K3345-1 Adapter	Compatible with single and dual procedure guns. Also requires K3345-1 Adapter
					

Tweco® is a registered trademark of Victor Technologies.
Miller® is a registered trademark of Miller Electric Mfg. Co.
Oxo® is a registered trademark of Miller Electric Mfg. Co.

RECOMMENDED ACCESSORIES

GENERAL OPTIONS



Inlet Bushing, Quick Connect Style
Quick connect bulk conduits
Order K3929-1



Wire Straightener
Straightens wire for the better, smoother feeding.
Order K1733-1



60C Coil Adapter
50-60 lb (22.7-27.2 kg) coil adapter for 2 inch spindles
Order K1504-1



Lift Bale
Insulated lift bale for suspending the wire feeder.
Order K3341-1



Protective Wire Spool Cover
Protective wire spool cover.
Order
K1634-4 for use with 30-40 lb. (13.6-18.1 kg) spools
K3340-1 for use with 50-60 lb (22.7-27.2 kg) spools.



Shielding Gas Filter
Protects the gas solenoid and gun from contaminants.
Order KP3103-1



Magnum® PRO Aluminum 225A 12P
Order K4797-X (Front Trigger)
Order K4795-X (Rear Trigger)
*Push-Pull Gun Connector required (See below)

DLF-84 Push-Pull Gun Connector (12 pin)
Ensure proper setup and compatibility for aluminum push-pull gun systems.
Order K5711-1

PRODUCT SPECIFICATIONS - POWER SOURCE

Product Name	Product Number	Input Power	Rated Output: Current/Voltage/Duty Cycle	Input Current @ Rated Output	Output Range	Dimensions H x W x D inches (mm)	Weight lbs (kg)
Flextec 350XP	K4272-2	380/460/575 3-Phase 50/60 Hz	350A/34V/60% 300A/32V/100%	25/28/22 21/23/23	5-425A	17 x 13 x 24 (432 x 330 x 609)	82 (37.1)
Flextec 350X PowerConnect	k4273-2	200-208/220- 230/380-415/460/575 3-Phase 50/60 Hz	350A/34V/60% 300A/32V/100%	45/40/23/19/15 37/33/19/16/13			84 (38.1)
		380-415/460/575 1-Phase 50/60 Hz	350A/34V/60% 300A/32V/100%	39/32/26 32/26/22			
		200-208/220-230 1-Phase 50/60 Hz	300A/32V/60% 270A/31V/100%	62/56 54/48			
Flextec 500X	K3607-1	380/460/575/ 3-Phase 50/60 Hz	500A/40V/60% 450A/38V/100%	39/31/31 33/27/27	5-500A	18.8 x 14 x 27.5 (477 x 356 x 699)	136 (62)

PRODUCT SPECIFICATIONS - WIRE FEEDER

Product Name	Product Number	Input Power	Rated Output: Current/Voltage/Duty Cycle	Solid Wire Diameter Range in. (mm)	Cored Wire Diameter Range In. (mm)	Wire Feed Speed Range: ipm (m/min)	Dimensions H x W x D in. (mm)	Weight lbs (kg)
DLF-84 Bench Model w Reel	K5287-2	40 VDC	600A @ 60%	0.025 - 3/32 (0.6 - 2.38)	0.035 - 0.120 (0.9 - 3.0)	35 - 1200 (0.89 - 30.5)	18.3 x 17.8 x 26.4 (465 x 452 x 671)	43 (19.5)

For best welding results with Lincoln Electric® equipment, always use Lincoln Electric consumables. Visit www.lincolnelectric.com for more details.

CUSTOMER ASSISTANCE POLICY

The business of Lincoln Electric is manufacturing and selling high quality welding equipment, automated welding systems, consumables, and cutting equipment. Our challenge is to meet the needs of our customers, who are experts in their fields, and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or technical information about their use of our products. Our employees respond to inquiries to the best of their ability based on information and specifications provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment, or to provide engineering advice in relation to a specific situation. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or communications. Moreover, the provision of such information or technical information does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or technical information, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose or any other equivalent or similar warranty is specifically disclaimed. Lincoln Electric is a responsive manufacturer, but the definition of specifications, and the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.