




POWER WAVE 455 WIRING DIAGRAM G3051-1 REV: J

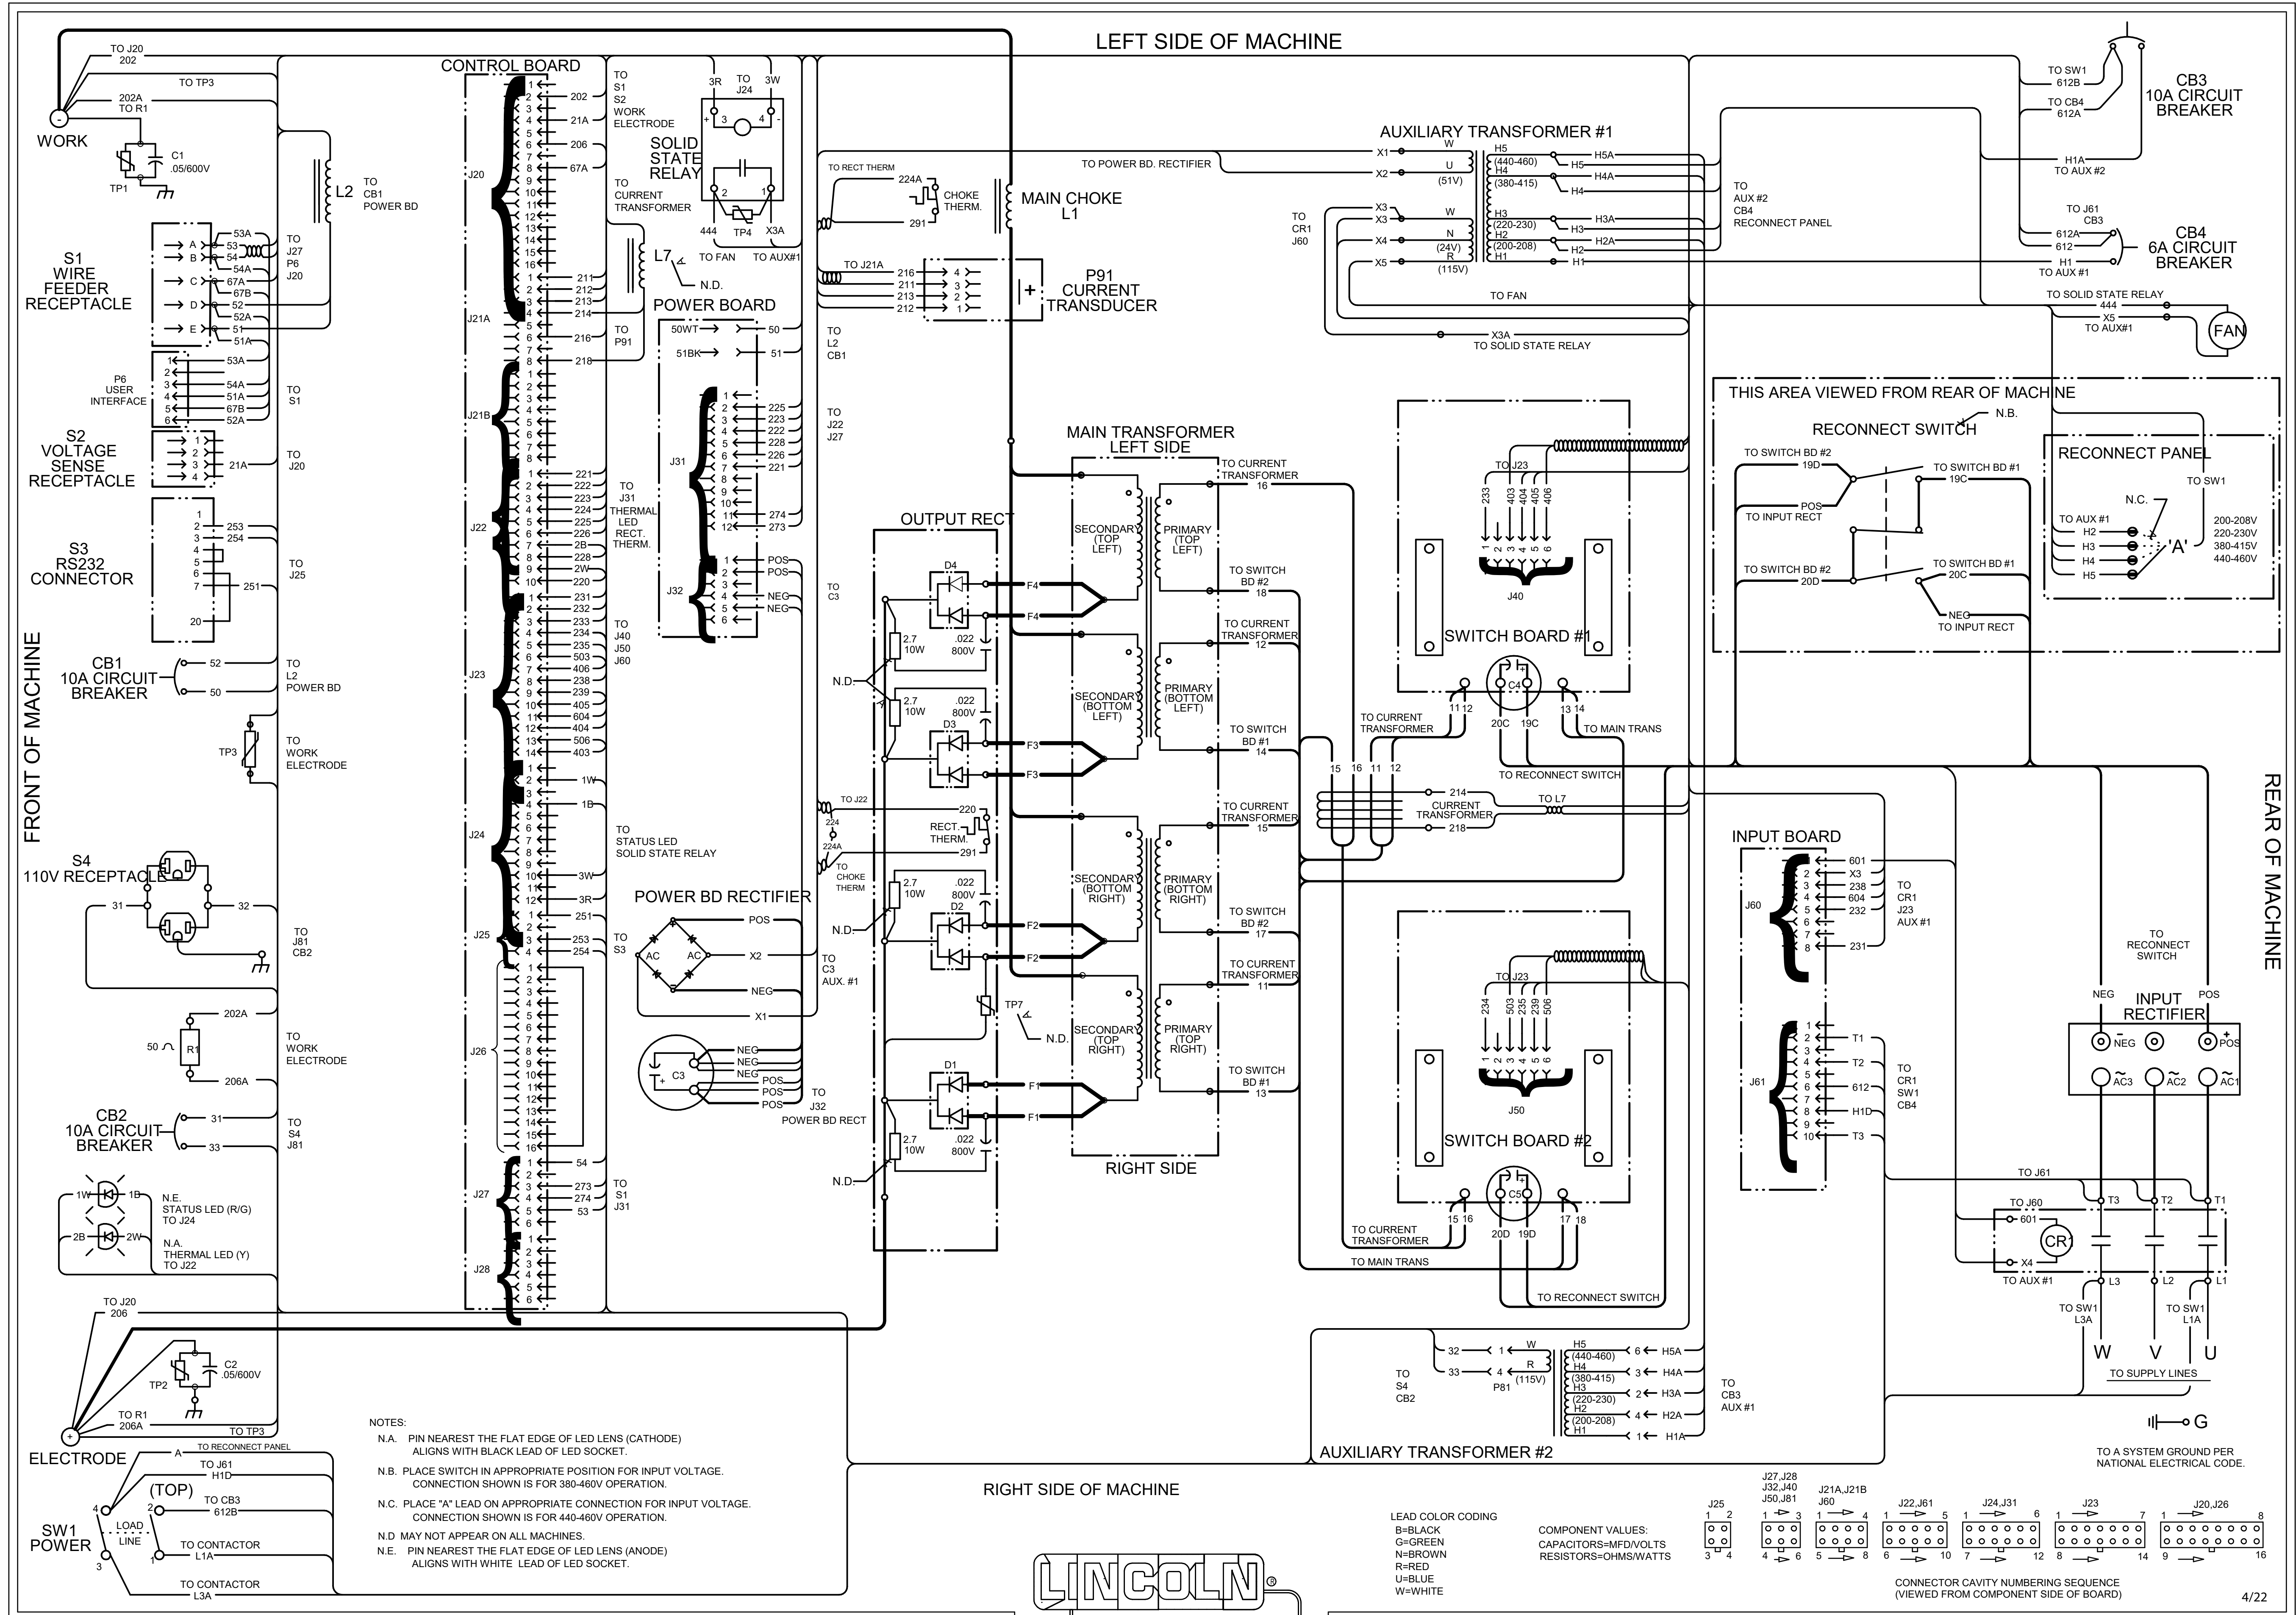

- NOTES:
- N.A. PIN NEAREST THE FLAT EDGE OF LED LENS (CATHODE) ALIGNS WITH BLACK LEAD OF LED SOCKET.
 - N.B. PLACE SWITCH IN APPROPRIATE POSITION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 380-460V OPERATION.
 - N.C. PLACE "A" LEAD ON APPROPRIATE CONNECTION FOR INPUT VOLTAGE. CONNECTION SHOWN IS FOR 440-460V OPERATION.
 - N.D. MAY NOT APPEAR ON ALL MACHINES.
 - N.E. PIN NEAREST THE FLAT EDGE OF LED LENS (ANODE) ALIGNS WITH WHITE LEAD OF LED SOCKET.

LEAD COLOR CODING
 B=BLACK
 G=GREEN
 N=BROWN
 R=RED
 U=BLUE
 W=WHITE

COMPONENT VALUES:
 CAPACITORS=MPD/VOLTS
 RESISTORS=OHMS/WATTS

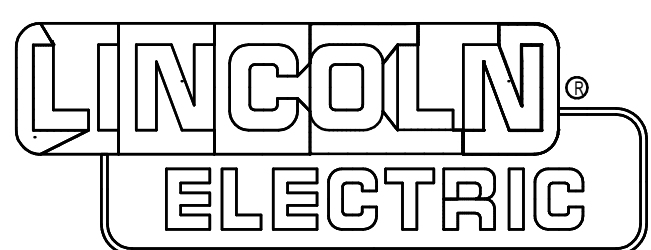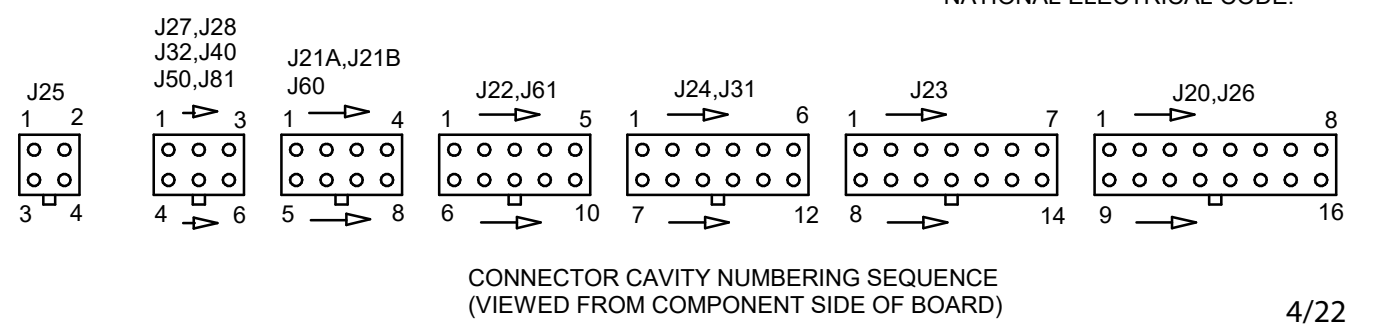

CLEVELAND, OHIO, U.S.A.