


# POWER FEED 10M DUAL FEEDER WIRING DIAGRAM G4319-1 REV: B

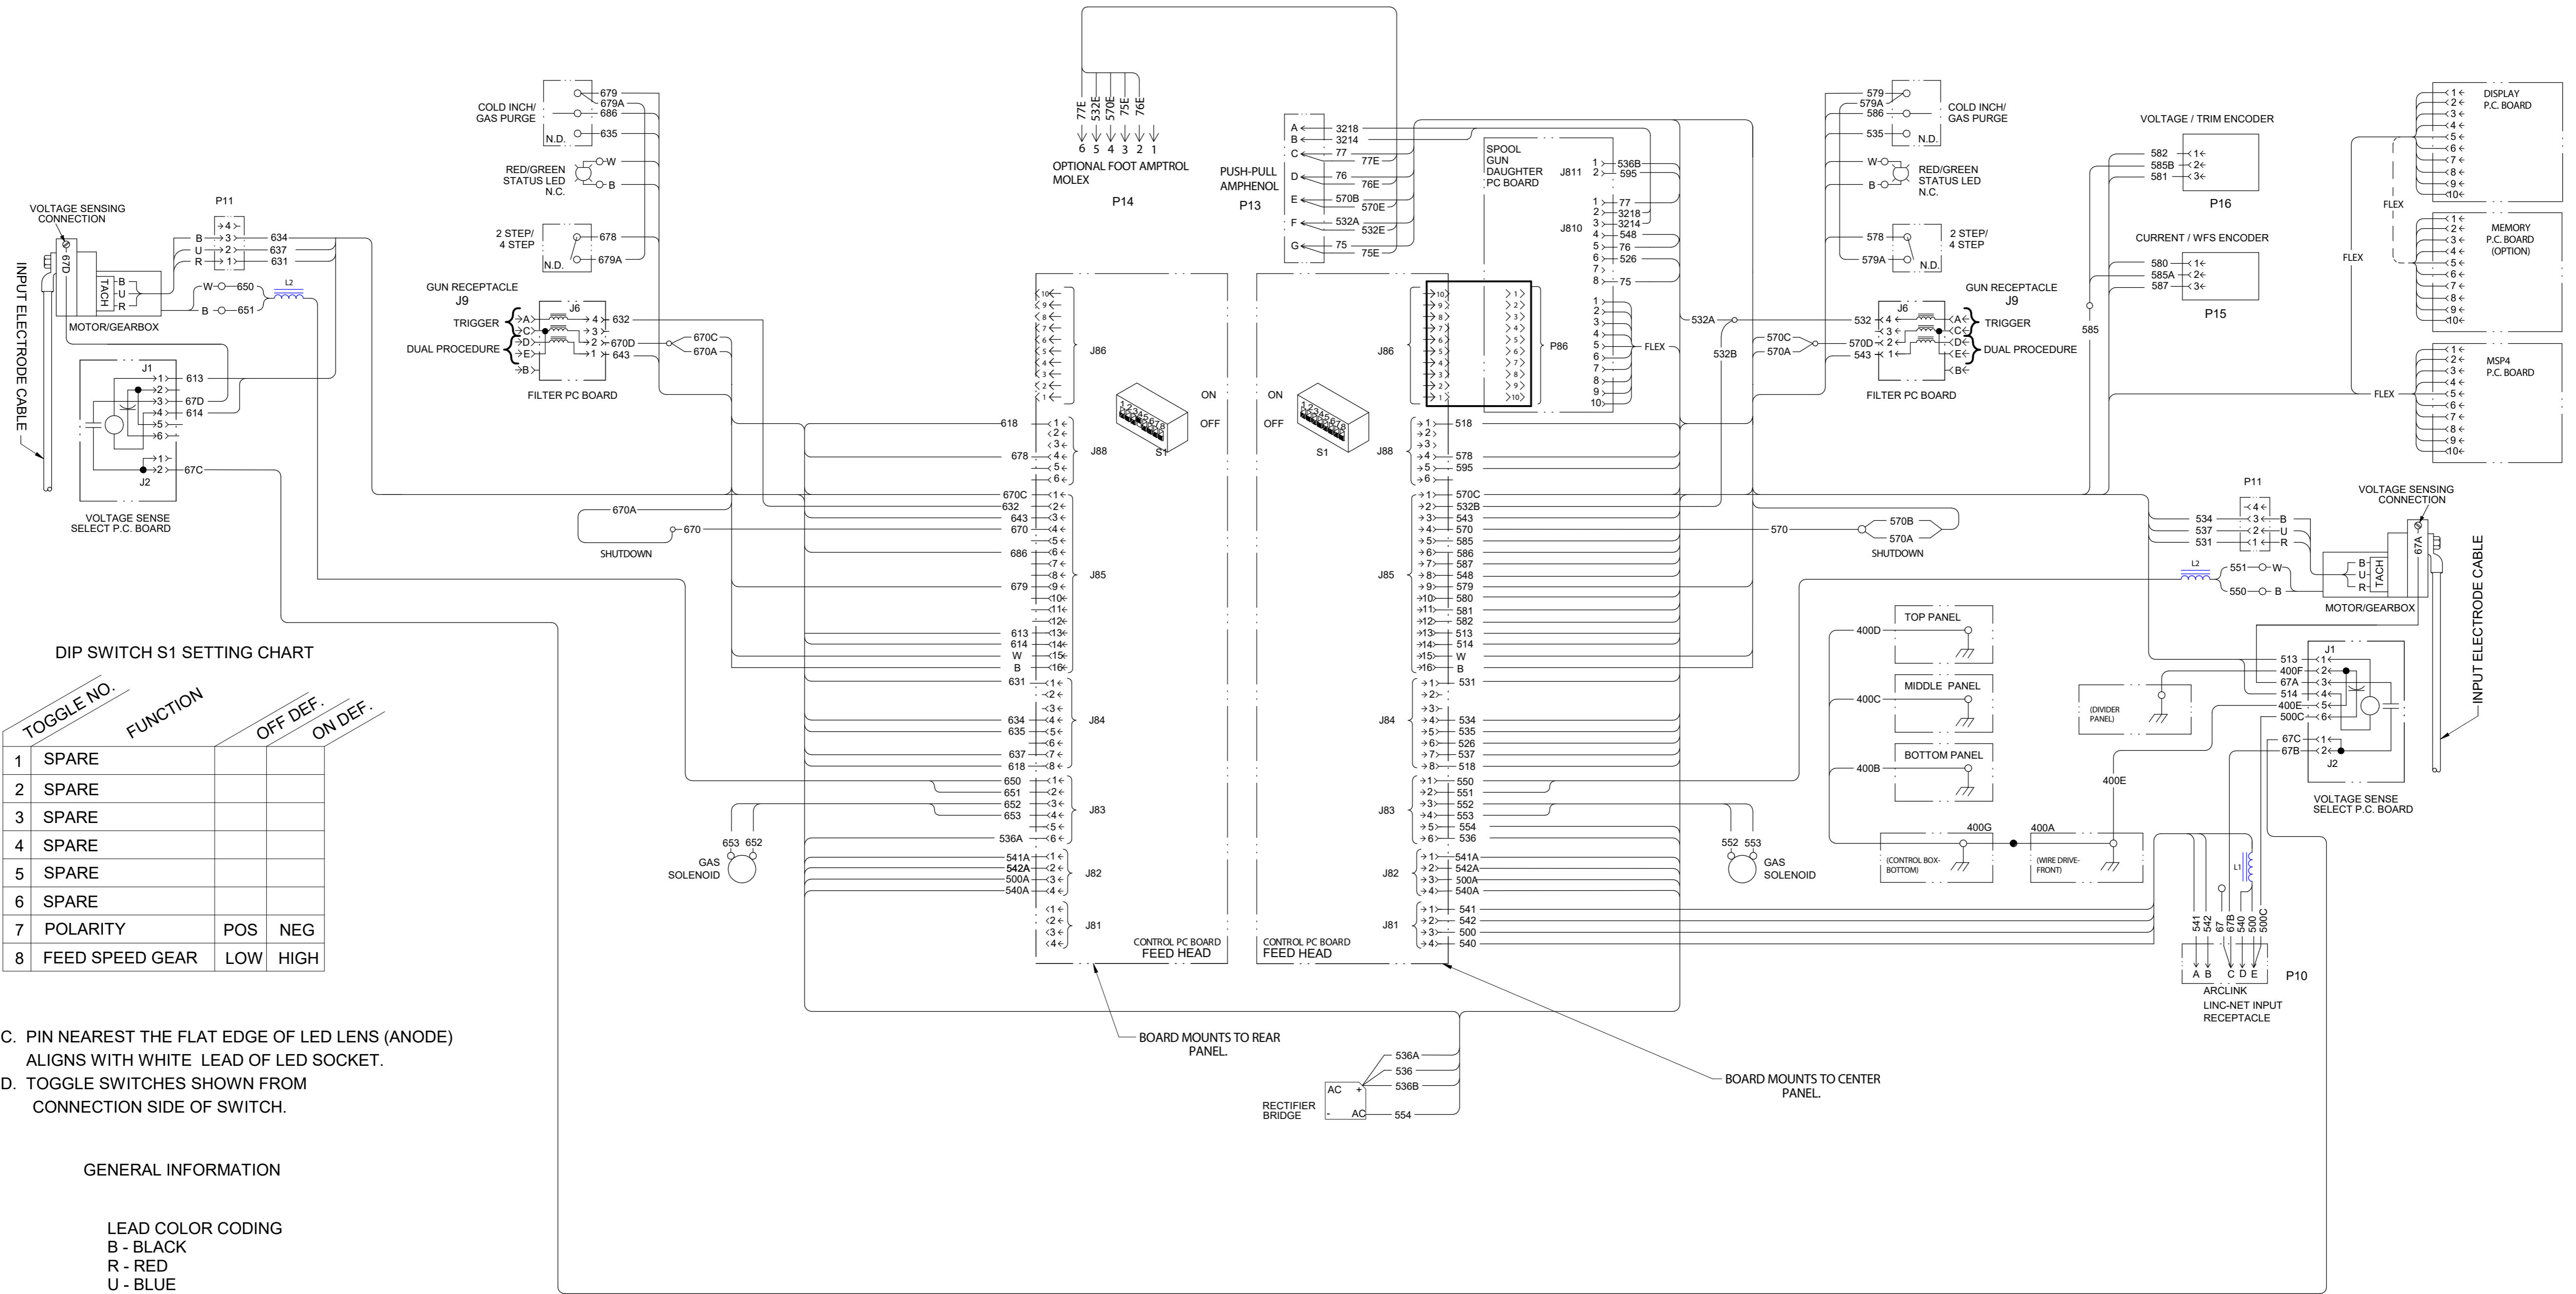

DIP SWITCH S1 SETTING CHART

TOGGLE NO.	FUNCTION	OFF DEF.	ON DEF.
1	SPARE		
2	SPARE		
3	SPARE		
4	SPARE		
5	SPARE		
6	SPARE		
7	POLARITY	POS	NEG
8	FEED SPEED GEAR	LOW	HIGH

N.C. PIN NEAREST THE FLAT EDGE OF LED LENS (ANODE) ALIGNS WITH WHITE LEAD OF LED SOCKET.  
 N.D. TOGGLE SWITCHES SHOWN FROM CONNECTION SIDE OF SWITCH.

GENERAL INFORMATION

LEAD COLOR CODING  
 B - BLACK  
 R - RED  
 U - BLUE  
 W - WHITE

CAVITY NUMBERING SEQUENCE  
 (VIEWED FROM COMPONENT SIDE OF P.C. BOARD)

