
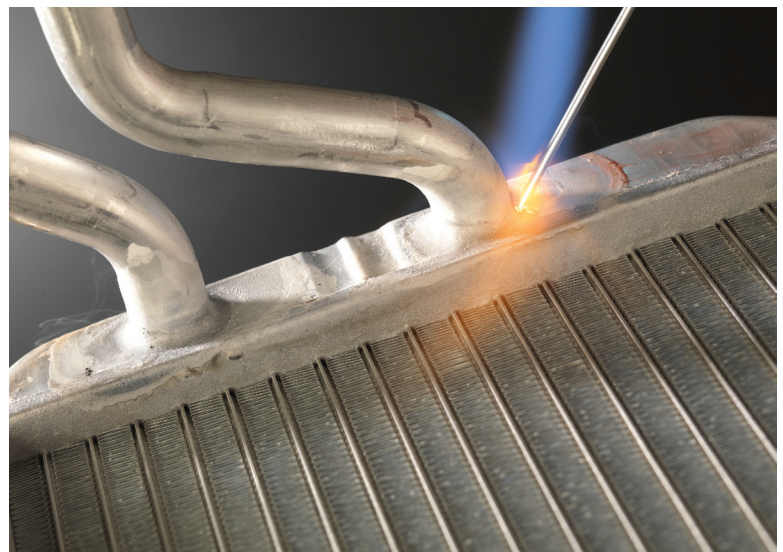


# ALUXCOR™ FLUX CORED ALUMINUM

OUR ALUXCOR 98/2 FLUX CORED ALUMINUM ALLOY IS SPECIFICALLY DESIGNED FOR ALUMINUM REPAIR APPLICATIONS. WITH ITS NON-CORROSIVE CESIUM FLUX AND LOWER MELTING TEMPERATURE ALLOY, IT PROVIDES A WIDER MELTING RANGE THAN TRADITIONAL ALUMINUM ALLOYS. THIS ALLOWS FOR MUCH EASIER REPAIRS IN THE FIELD.

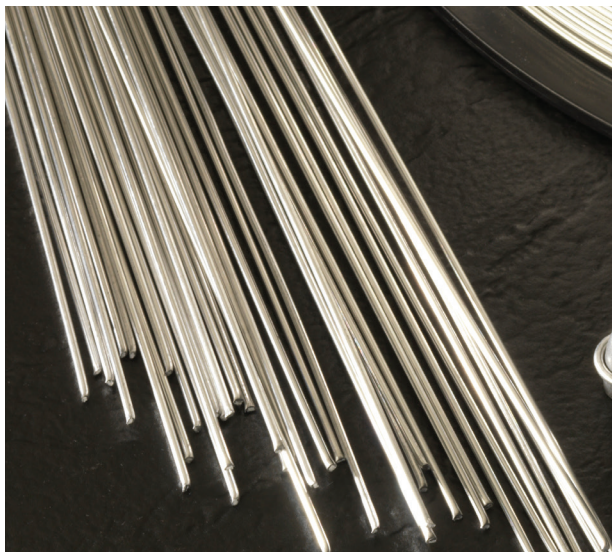

## FLUX CORED ALUMINUM ALLOY

ALLOY	PART NO.	DESCRIPTION	Al %	Zn %	MELTING RANGE °F	MELTING RANGE °C	FLUX CORE
<b>ALUXCOR</b> 98/2	ZN98CW20500L	2mm x 500mm 1 lb. Tube	2	98	710-725	377-385	Cesium Flux Formula - Non-corrosive and non-hygroscopic

## NEW PRODUCT

The Harris Products Group  
 A Lincoln Electric Company  
 4501 Quality Place - Mason, OH 45040  
 Customer Service: 1.800.733.4043  
 Fax: 513.754.8778  
[www.harrisproductsgroup.com](http://www.harrisproductsgroup.com)



A LINCOLN ELECTRIC COMPANY

Turn to the  
**ALUXCOR™**  
 ALUMINUM FLUX CORED  
**Pros**