


SP-135 PLUS WIRING DIAGRAM M19922 REV: G




- Do not operate with covers removed.
- Disconnect input power by unplugging power cord before servicing.
- Do not touch electrically live parts
- Only qualified persons should install, use or service this machine.

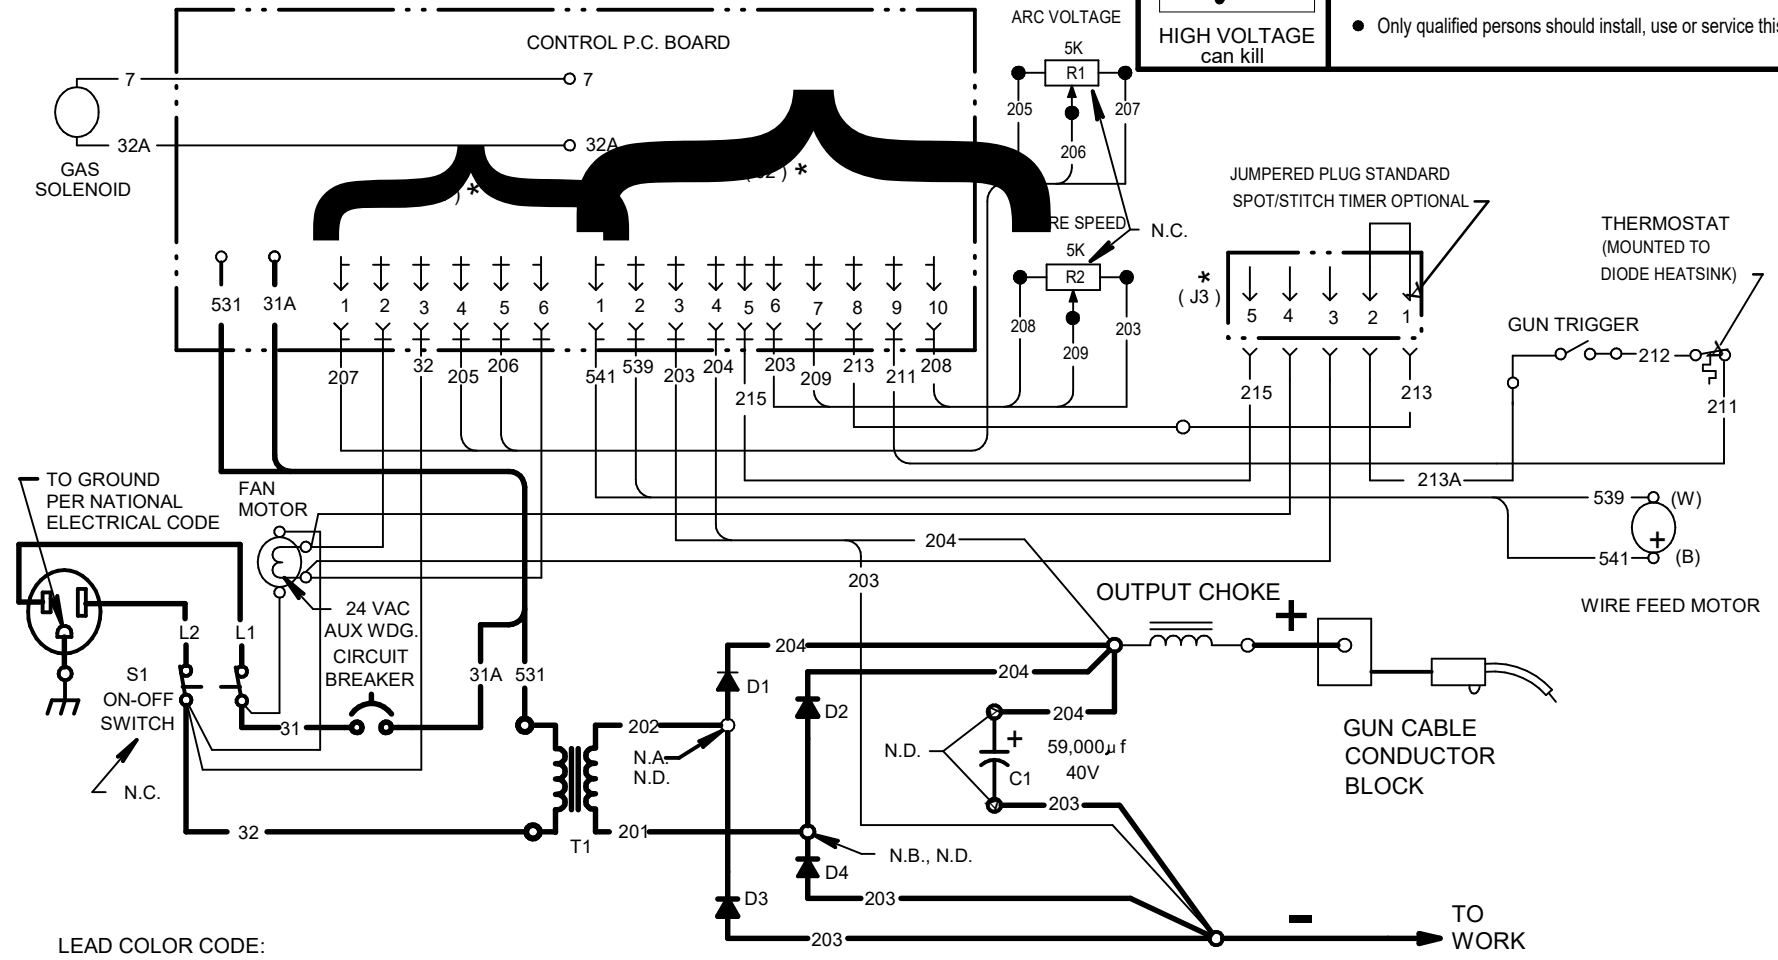

LEAD COLOR CODE:
B-BLACK W-WHITE

- NOTES:
- N.A. DIODES D1 & D3 ARE MOUNTED ON THE OUTSIDE HEATSINK.
 - N.B. DIODES D2 & D4 ARE MOUNTED ON THE INSIDE HEATSINK, WHICH IS CLOSEST TO THE CENTER PANEL.
 - N.C. COMPONENT VIEWED FROM REAR.
 - N.D. BOLTED ALUMINUM CONNECTIONS REQUIRE T12837 JOINT COMPOUND (DOW CORNING 340) WHEN REATTACHING.

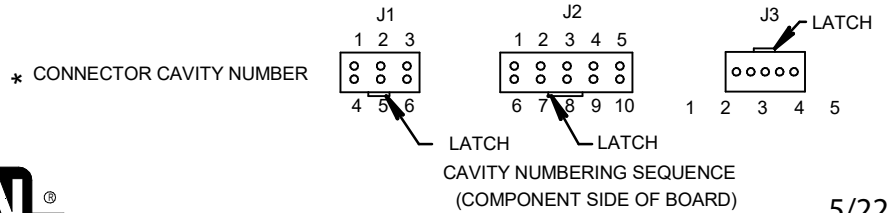

CLEVELAND, OHIO U.S.A.