


POWER FEED 10M DUAL BOOM FEEDER WIRING DIAGRAM G4319-2 REV: B

GENERAL INFORMATION

LEAD COLOR CODING
 B - BLACK
 R - RED
 U - BLUE
 W - WHITE


CAVITY NUMBERING SEQUENCE (VIEWED FROM COMPONENT SIDE OF P.C. BOARD)

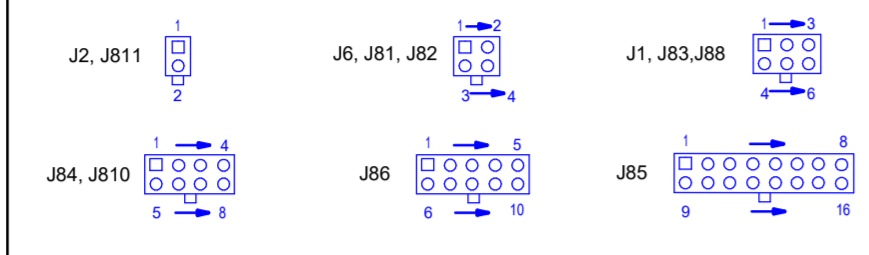

N.C. PIN NEAREST THE FLAT EDGE OF LED LENS (ANODE)
 ALIGNS WITH WHITE LEAD OF LED SOCKET.
 N.D. TOGGLE SWITCHES SHOWN FROM
 CONNECTION SIDE OF SWITCH.

WIRE DRIVE DIP SWITCH S1 SETTING CHART

TOGGLE NO.	FUNCTION	OFF DEF.	ON DEF.
1	SPARE		
2	SPARE		
3	SPARE		
4	SPARE		
5	SPARE		
6	SPARE		
7	POLARITY	POS	NEG
8	FEED SPEED GEAR	LOW	HIGH

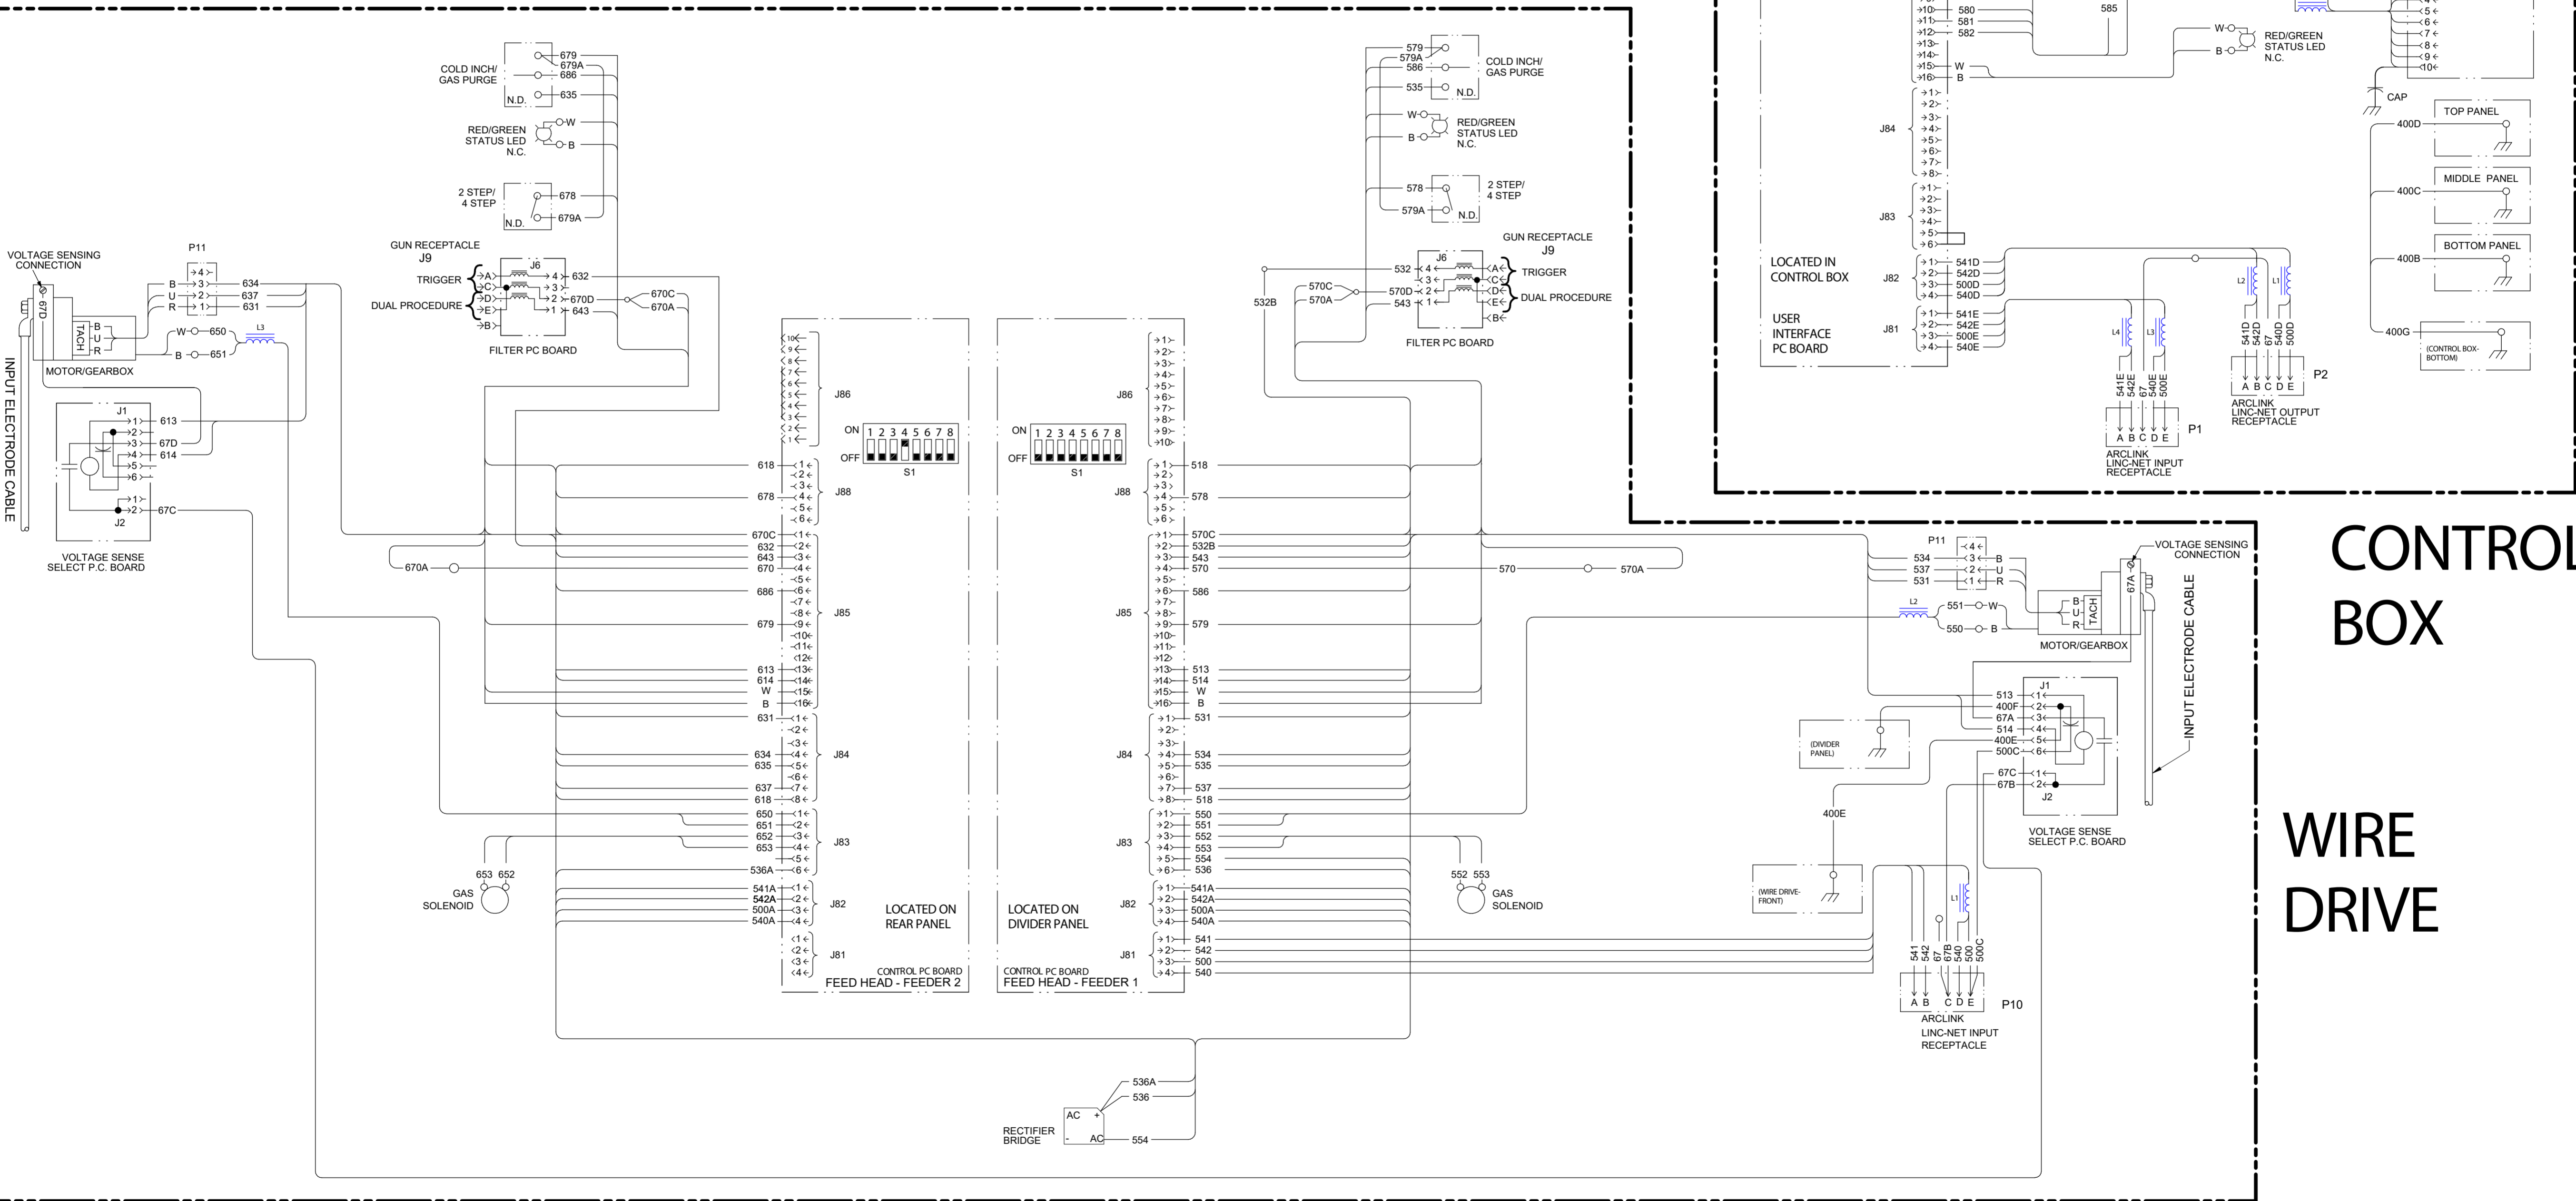

**CONTROL
BOX**

**WIRE
DRIVE**