

**MODELS:** W2993-ALL-CE, W2994-ALL-CE, W2985-M-CE, W2985-L-CE, W2985-XL-CE, W2985-2XL-CE, W2985-3XL-CE, W2987-M-CE, W2987-L-CE, W2987-XL-CE, W2987-2XL-CE, W2987-3XL-CE, W3106-M-CE, W3106-L-CE, W3106-XL-CE, W3106-2XL-CE, W3106-3XL-CE, W3112-M-CE, W3112-L-CE, W3112-XL-CE, W3112-2XL-CE, W3112-3XL-CE, W2995-ALL-CE, WP10570-M, WP10570-L, WP10570-XL, WP10570-2XL, WP10570-3XL

**PLEASE READ THESE INSTRUCTIONS CAREFULLY**

Current legislation holds the employer (user) responsible for the identification and choice of appropriate PPE for the risks present in the workplace (in terms of the features and category of PPE). It is therefore essential to check that the features of this model are appropriate for your requirements before beginning to use it. The employer must also inform the worker in advance of the risks the PPE protects against, providing instruction and/or training in proper use and practical utilization of the PPE if necessary. This Note must be kept for the entire time in which the PPE is in use.

**Notified body:** TÜV Rheinland LGA Products GmbH, Tillystraße 2, D-90431 Nürnberg, Germany (notified body number 0197)

**Composition:**

Jacket: Split Leather, Grain Leather, black 100% cotton FR fabric flame retardant cotton  
Headwear: black 100% cotton FR fabric flame retardant cotton

**Category:**

Jacket & Headwear: Cat II

**USE**

The garments described in this note comply with the specifications contained in European standards and are suitable for the use described below; They are NOT suitable for any other use.

Rules (EU) 2016/425 European Regulation on Personal Protective Equipment

UNI EN ISO 13688:2013: (general requirements for innocuousness, ergonomics and sizes), UNI EN ISO 11611:2015: (use in welding operations and related procedures)

Jacket & Headwear - flame retardant cotton - is intended for class 1 welders and is suitable for using during manual welding with minor splatter and drop formation, such as, for example: gas welding, TIG welding, MIG welding, plasma micro-welding, brazing, spot welding, MMA welding (with rutile-covered electrode), and for the operation of oxygen cutting machinery, plasma cutting machinery, resistance welding machines, thermal spray painting machines, and countertop welding machines. The garment protects against accidental contact with small flames, splattered molten metal, radiating heat and brief accidental electrical contact.

**GENERAL WARNINGS**

Garments only protect the part of the body effectively covered, and so they must be integral, appropriate for their intended use, and used with suitable PPE for protecting uncovered body parts (legs, head, hands, feet). Protection against the risks identified in this note is not guaranteed if garments are used alone. The garment protects part of the body, and to provide complete protection it must be worn with garments offering the same characteristics for protection of the remaining parts of the body. The safety features described are guaranteed only if the garments are the right size, correctly worn, fastened up, and in perfect condition.

Inspect them before each use to make sure that they are in perfect condition, integral and clean; replace them if they are not integral (loose stitches, breakage or holes); if they are dirty, clean as described in the

MAINTENANCE section. The manufacturer shall not be held liable for any damage or other consequences of improper use, or if the PPE has been modified in any way with respect to its certified configuration. If the instructions provided in this note are not followed, the PPE will lose its technical and legal effectiveness. The user must not remove the garments at any time while in the work area at risk.

**SPECIFIC WARNINGS**

With the welding processes of intended use the following hazards are identified: flames, spatter of molten material, radiant heat as well as short term electrical shock.

High voltage: This product protects against short term electrical shock and not against long term high voltages !! Welding and cutting machines can cause these so follow the safety instructions of the machines used as well !

If used correctly, the garments protect against the hazards normally associated with welding, including exposure of the skin to ultraviolet radiation (UV rays) produced in all electric arc welding operations, including high intensity UVA, UVB and UVC radiation; fabric tends to degrade with use, and so garments of this type should be tested regularly (for example, once a week) to ensure that they provide UV protection by exposing the garment to the light of a 100 W tungsten lamp at a distance of about 1 m; if you can see the light through the fabric, UV radiation can also penetrate it.

If users note symptoms of sunburn, this means UVB rays can penetrate the fabric. In each of these cases, the garments must be repaired (if possible) or replaced, and users should consider wearing additional, stronger protective layers in the future. Garments only protect against brief accidental contact with parts of the arc welding circuit under voltage; in the presence of a serious risk of electrocution, additional electrical insulation is required. The garments protect against brief accidental contact with electrical leads at a voltage of up to approximately 100 V DC.

Electrostatic charges are drained through the garment and the wearer's body. The user should therefore be equipped with suitable antistatic footwear (EN ISO 20344 or EN ISO 20345), and make sure that the floor or the surface underfoot is not insulated.

Increased oxygen in the air significantly reduces the garment's ability to protect against flame, so be careful when welding in small spaces if there is a possibility that there may be extra oxygen in the air. Protective garments for welders provide reduced electrical insulation if they are wet, damp, or sweaty. Ability to limit the propagation of flame may be reduced if garments are contaminated with flammable products. In the event of accidental contact with chemical or flammable liquids, the garment must be removed, taking care to ensure that the liquid does not come into contact with the skin, and the garment must be washed or replaced.

In the event of impact with molten metal, the worker must leave the workstation immediately and remove the garment; in the event of impact with molten metal, the garment could fail to eliminate all risk of burns if worn in contact with the skin.

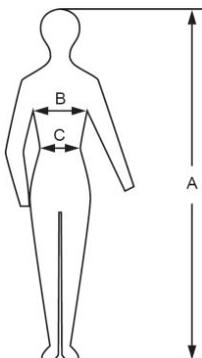
For additional protective garments warning is given that the garment is intended to be worn in addition to protective clothing providing protection against offers dangers during welding.

**INTERPRETATION OF PERFORMANCE LEVELS**

UNI EN ISO 13688:2013	Requirements	Results
Determination of pH	3.5<pH<9.5	
Determination of carcinogenic aromatic amines	Not measurable	
Fat content	<15%	

UNI EN ISO 11611:2015	Requirements	Grain Leather results	Split Leather results	Fabric results
Limited propagation of flame (UNI EN ISO 15025 A)				
no flame on edges	NO			
hole formation	NO			
flaming residues	NO			
persistence of flame	< 2 s			
residual incandescence	< 2 s			
Resistance to radiating heat RHTI24 (ISO 6942)	Class 1 RHTI24 >= 7s Class 2 RHTI24 >= 16s			
Resistance to minor splatters of metal (ISO 9150)	Class 1 >= 15 drops Class 2 >= 25 drops			
Resistance to tearing(EN ISO 3377-1)	Class 1 >= 15 N Class 2 >= 20 N			
Resistance to tensile stress (EN ISO 3376)	> 80 N			

**Sizing according to: EN ISO 13688 (in CM)**



Art.nr.	A	B	C
W2985-SIZE-CE	166-200	98-160	90-120
W2987-SIZE-CE	166-200	98-160	90-120
W3106-SIZE-CE	166-200	98-160	90-120
W3112-SIZE-CE	166-200	98-160	90-120
WP10570-SIZE	166-200	98-160	90-120

	M	L	XL	XXL	XXXL
	48	52	56	60	64
<b>A</b>	171-176	177-182	183-187	188-192	193-196
<b>B</b>	96	104	112	120	128
<b>C*</b>	84	92	100	112	124


\*C = +5 CM.

MARKINGS (example)


IMPRINTS OF FR DOO RAG MODEL MODEL W2993-ALL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	---	----------------------

IMPRINTS OF FR WELDING BEANIE MODEL W2994-ALL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	--	----------------------

IMPRINTS FR WELDING JACKET MODEL W2985-M-CE, W2985-L-CE, W2985-XL-CE, W2985-2XL-CE, W2985-3XL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	--	----------------------


IMPRINTS GRAIN LEATHER-SLEEVED JACKET MODEL W2987-M-CE, W2987-L-CE, W2987-XL-CE, W2987-2XL-CE, W2987-3XL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	---	----------------------


IMPRINTS TRADITIONAL SPLIT LEATHER-SLEEVED JACKET MODEL W3106-M-CE, W3106-L-CE, W3106-XL-CE, W3106-2XL-CE, W3106-3XL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	---	----------------------

IMPRINTS FR WELDING LAB COAT MODEL W3112-M-CE, W3112-L-CE, W3112-XL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	--	----------------------

IMPRINTS FR WELDING HOOD MODEL W2995-ALL-CE  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	---	----------------------

IMPRINTS TROUSERS BLACK, FLAME RETARDANT COTTON MODEL WP10570-M, WP10570-L, WP10570-XL, WP10570-2XL  
MARKINGS (example)

<p>Batch number Manufacturer's name</p> <p>Description/ Item number</p> <p>Symbols / CE marking</p> <p>Size</p> <p>Read note Manufacturer's address Country of origin</p>		<p>Batch n°xxxxx</p>
---	--	----------------------

You can find the Declarations of Conformity on the web site: [www.weldline.eu](http://www.weldline.eu)

MEANING OF MARKINGS:

CE is a guarantee of free circulation in the trade of products and goods within the European Economic Community. CE marking on the product means that the product meets the essential requirements of European Directive.

Rules EU 2016/425.

TRANSPORTATION AND STORAGE

Transport and store the garment in its original package, in a cool, dry place far away from heat sources and protected from light. Do not fold or crush.

DISPOSAL

If the garments have not been contaminated with particular substances or products, they may be disposed of along with ordinary fabric waste; if they are contaminated, they must be disposed of in accordance with legislation governing special waste.

MAINTENANCE

Jacket: Flame retardant cotton with Split Leather or Grain Leather



Do not wash Do not bleach Do not tumble dry Do not iron Do not dry clean

Jacket: black 100% cotton FR fabric, flame retardant cotton  
Headwear: black 100% cotton FR fabric, flame retardant cotton



5 washing cycles