

# PRESTOJET 25i

SAF-FRO

Portable, flexible cutting  
power up to 10 mm



## Cut through any conductive material in seconds

**PRESTOJET 25i** is the most flexible plasma cutting machine you could envisage. The unit arrives ready to go, able to cut fast and precisely. Powered from a standard 230V input supply, the machine is ideal for work on site. Forget the grinder, simply take the torch and cut in seconds.

### Features

- ✓ Plasma Flexible: only 230 V input required
- ✓ High performance: innovative advanced electrode and nozzle design
- ✓ Robust: long life compressor
- ✓ Portable: only 18.5 kg, small and compact
- ✓ Different materials: mild steel, stainless steel, aluminium and many more
- ✓ Concentrated plasma stream: less heat input, less distortion
- ✓ Internal compressor or external



INTERNAL  
COMPRESSOR OR  
EXTERNAL AIR

### UNIT INCLUDES

- 2 m input cable with 16A plug
- Mounted 3 m hand cutting torch
- Ground clamp and cable
- Air connection kit
- Cutting torch consumables kit

Output



Input



# PRESTOJET 25i



## To order



Designation	Item Number
<b>PRESTOJET 25i</b>	<b>W000404423</b>
LC25 (Hand)	PTH-C25A-SL-3MR
Wear part box LC25	W03X0893-118A
Air Filter LAF1250	W88X1456A
Filter Cartridge	W8800117R
Cutting circle	W0300699A
Undercarriage	W0200002



## Applications

- ✓ On site maintenance
- ✓ Service tasks
- ✓ Small construction sites
- ✓ General installations
- ✓ Air ducting installation (HVAC)
- ✓ Demolition work
- ✓ Rental

## Performance

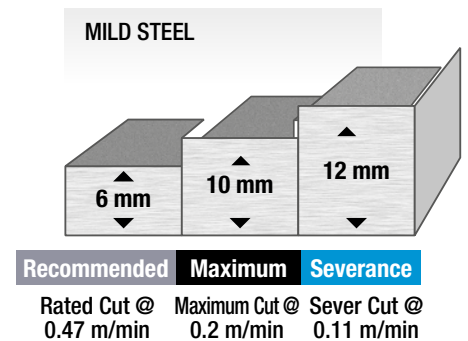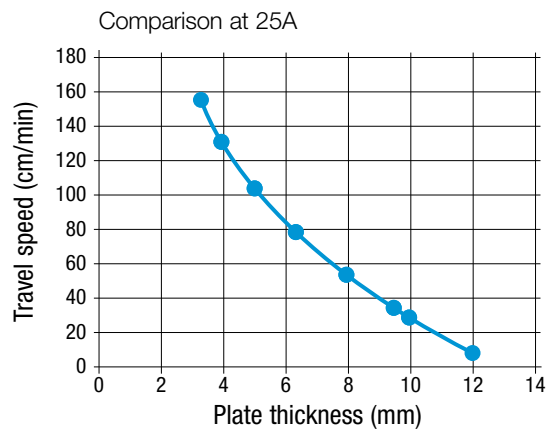

## Technical characteristics

Item Number	Primary Voltage (50-60Hz)	Rated Output	Cutting Capacity (mm)	Flow Rate	Inlet Pressure	Output Range (A)	Weight (kg)	Dimensions HxWxD (mm)
W000404423	230V/1Ph	25A/90V/35% 20A/88V/60% 15A/86V/100%	10	80l/min+/- 20%@5.0bar	6.0 bar	10-25	18.5	385 x 215 x 480



www.saf-fro.com

